



社 训

发挥综合能力，通过开发高性能的产品和技术，
为社会发展做贡献。

立足现在，开拓未来，为公司的繁荣和员工的幸
福而努力。

以创造性和勇气挑战未知领域。

经营理念

通过产品、技术和服务，致力于社会基础设施的
建设和创造舒适的生活环境，为社会的发展和地球环
境保护做贡献。

 久保田泵业(安徽)有限公司
KUBOTA PUMP(ANHUI)CO.,LTD

地址: 安徽省马鞍山市和县经济开发区
(Add): He Xian County Ma An Shan City Economic Development
Zone in Anhui Province
电话(Tel): 0555-5338018
传真(Fax): 0555-5338020
Http://www.kubota-sanlian.cn
邮编(P.C): 238200

For Earth, For Life


“For Earth, For Life”

久保田集团与大家相约，在保护美丽的地球环境的同时，
今后要持续为人们带来更加美好的生活。



SV-JAI 系列 卧式单级端吸水泵





久保田泵业(安徽)有限公司位于安徽省和县经济开发区,由日本久保田株式会社与安徽三联泵业于2009年12月30日正式签订合资合同,经巢湖市工商局注册成立。总投资1.15亿元人民币。

公司引进久保田先进的流体分析技术,精湛的制造工艺,精细化的管理模式,并依托三联泵业先进的生产设备,完备的监测中心来塑造完美的产品。公司主要生产双吸式蜗壳泵、大型潜水泵以及城市污水处理泵等高新技术产品,产品主要销往东南亚及其他海外市场。

KUBOTA PUMP (ANHUI) CO . , LTD is located at economic development zone of HE County , ANHUI PROVINCE , P . R . C . The Joint Venture Agreement between KUBOTA and SANLIAN PUMP was signed on December 30th 2009 . The company was later registered under Industrial and Commercial Bureau of CHAOZHOU city . the total investment is 115 million RMB .

Introducing the advanced fluid dynamic analysis technics, superior construction technics, precise management mode from KUBOTA to this joint venture company, combined with the very best and advanced machines, equipments , tools as well as the sophisticated testing center at SANLIAN PUMP, the perfect products can be guaranteed to be made. The company mainly produce high technical products like double suction volute pump, large-scale submersible pump and city sewage pump etc, with high technical skills and advanced manufacturing engineering, the products mainly sell to the Southeast Asia and other international market.



SV系列型谱图

SV系列端吸泵:

端口进水,上口出水,有直联和长联轴器两种结构,

其中长联轴器结构的泵头和电动机固定在底板上,

通过弹性联轴器联结,真正的后退式设计,G6.3等级的叶轮平衡。

适用于HVAC系统的循环水,供水和工业用途。


工作范围:900T/h, 150m


液体温度:-15℃ - 120℃ ;

承压: 12,16, 25bar。



型谱图 SELECTION CHART

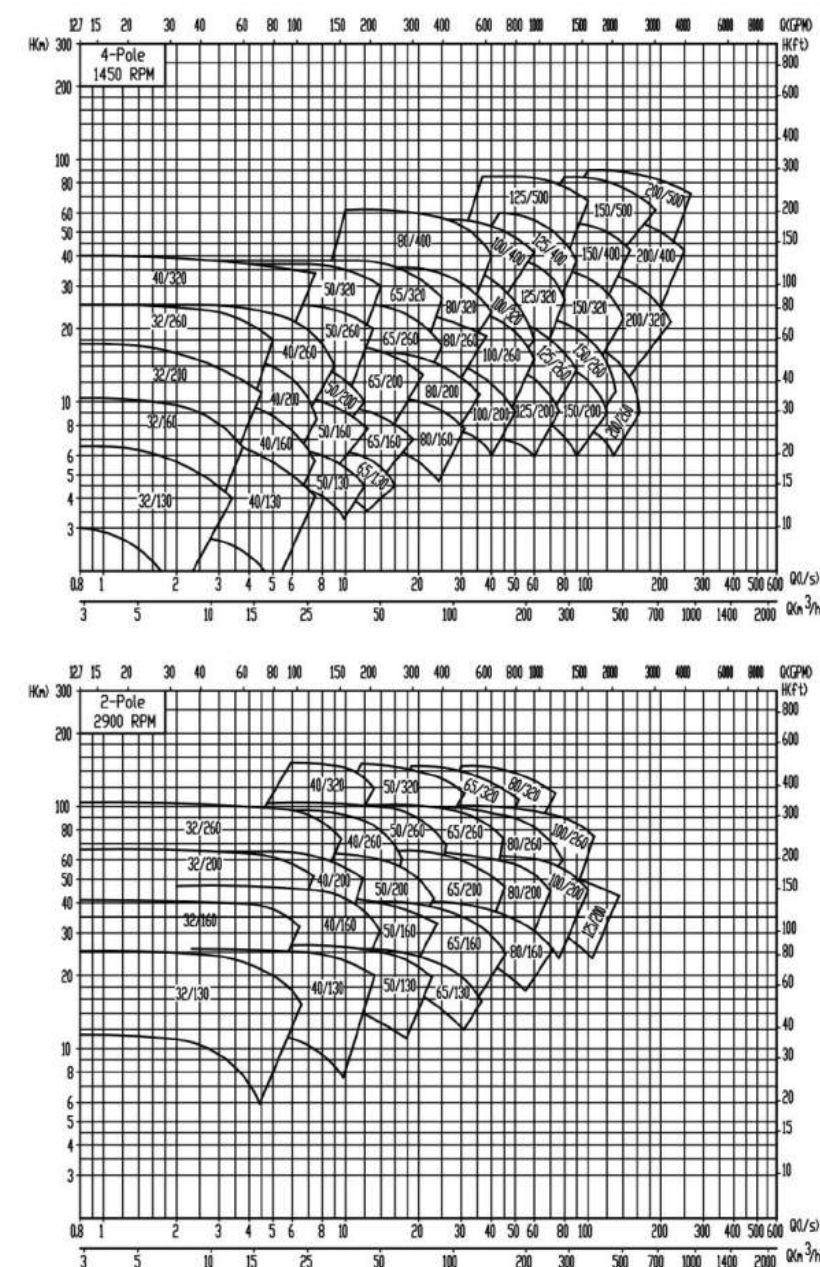

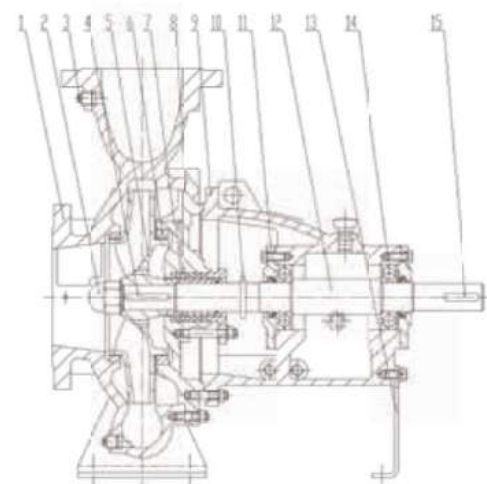

1. 泵体 2. 泵盖 3. 叶轮 4. 叶轮平键 5. 叶轮
6. 密封环 7. 泵盖 8. 泵体口形圈 9. 泵盖 10. 排水圈
11. 轴盖 12. 轴 13. 泵盖支架 14. 轴承 15. 泵盖平键

水泵型号说明:

SV-JAI 65 / 130

叶轮名义直径
水泵出水口径
水泵类型





SV系列端吸泵材料:

部件名称	材质-标准(可选)
水泵壳体	铸铁HT250(不锈钢)
叶轮	青铜(不锈钢)
轴	420不锈钢
轴套	304不锈钢(316)
轴承	NSK(SKF/NTN)
机械密封	John.Crane(Burgmann)
联轴器	半弹性(弹性)
电动机	ABB/SIEMENS
水泵底座	碳钢Q235

SV系列端吸泵特点:

- 水泵整机按美国水力协会标准测试
- 叶轮按客户需求切削和平衡
- 泵体的制造标准满足DIN24255标准, 符合ISO4960制造标准.
- 电动机符合IEC标准
- 后退式设计, 维修时无需拆卸管路. 维修和更换部件非常简单.
- 软联结, 确保水泵平稳运行, 降低噪音较少因为对中偏移产生的轴承磨损.
- 安装在坚固支脚上的蜗壳, 坚固的底座
- 计算器控制的精确叶轮切割和平衡

PERFORMANCE CURVES (4-pole)

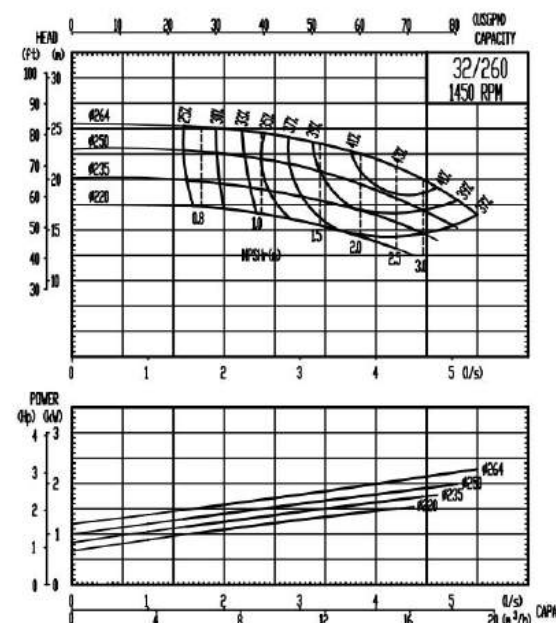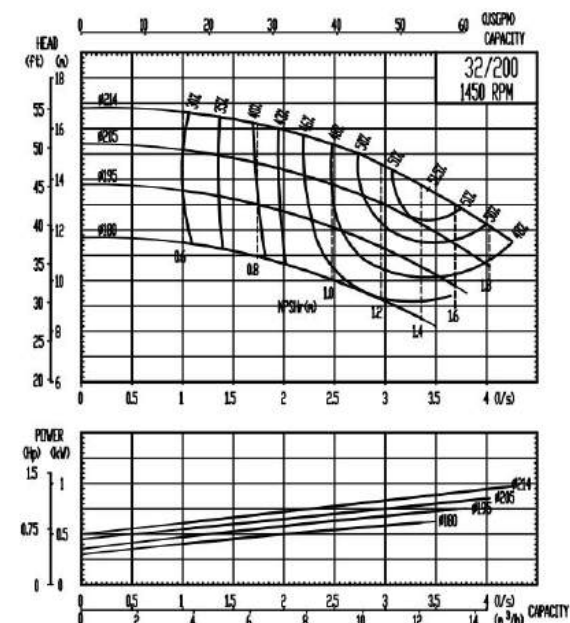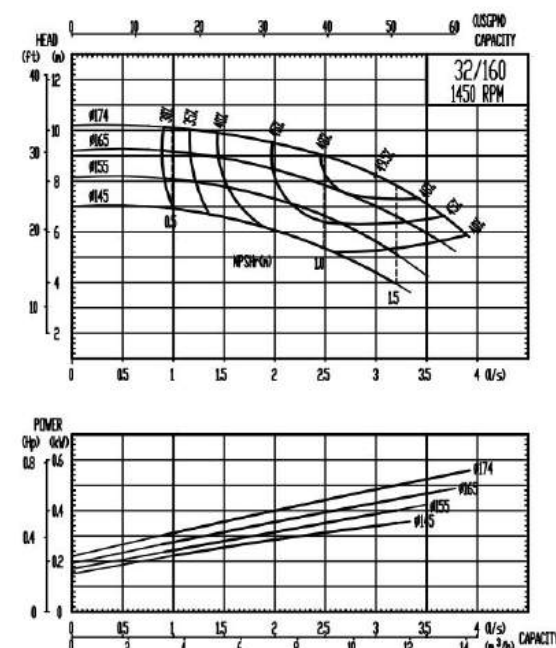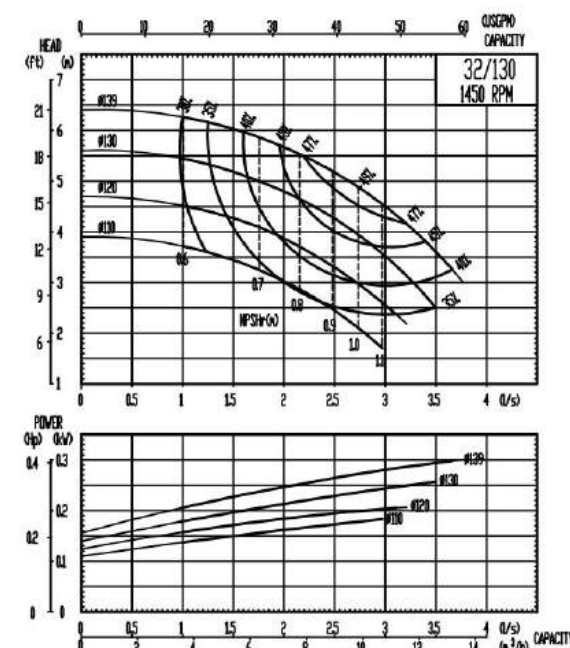

标准安装方式


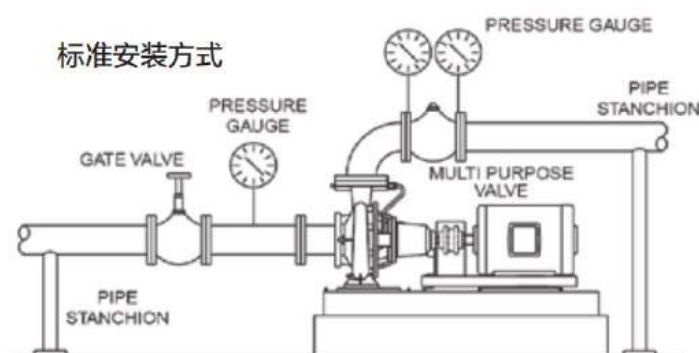



Fig. 3 - Typical Installation - Horizontal Piping

紧凑安装方式




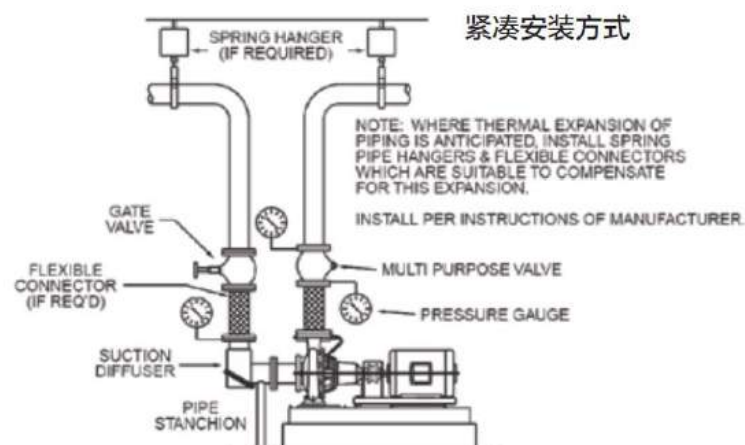



PERFORMANCE CURVES (4-pole)

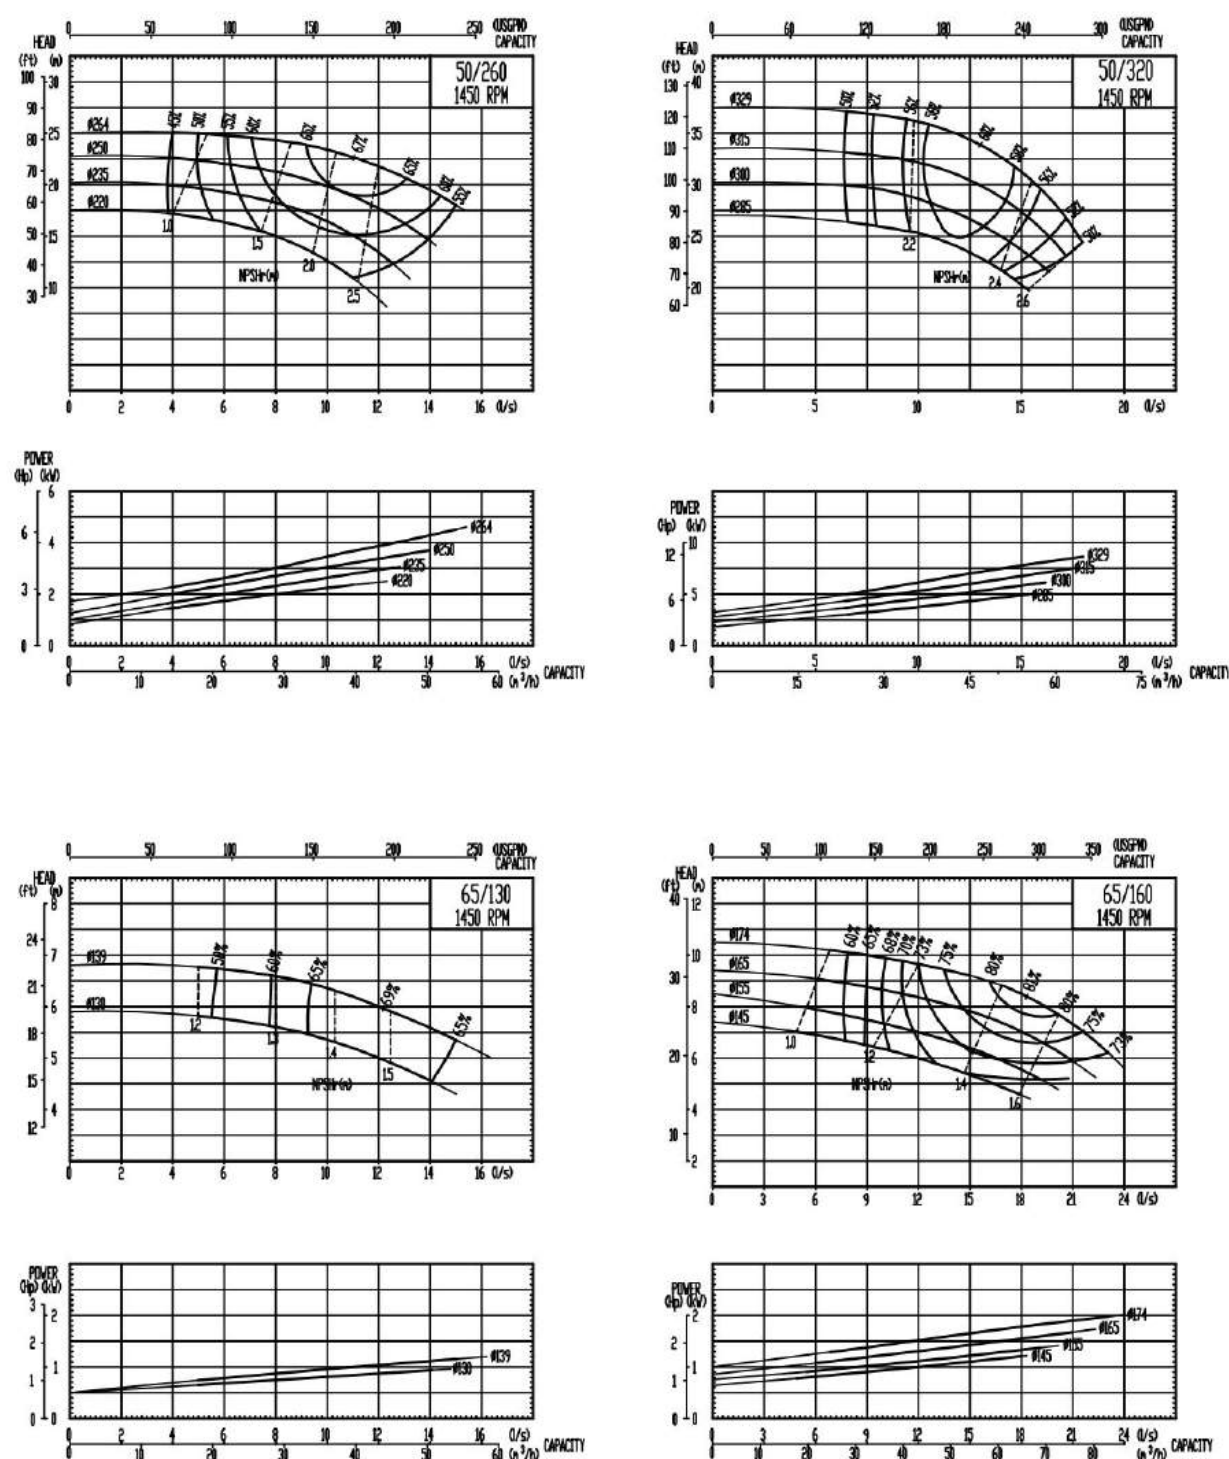



PERFORMANCE CURVES (4-pole)

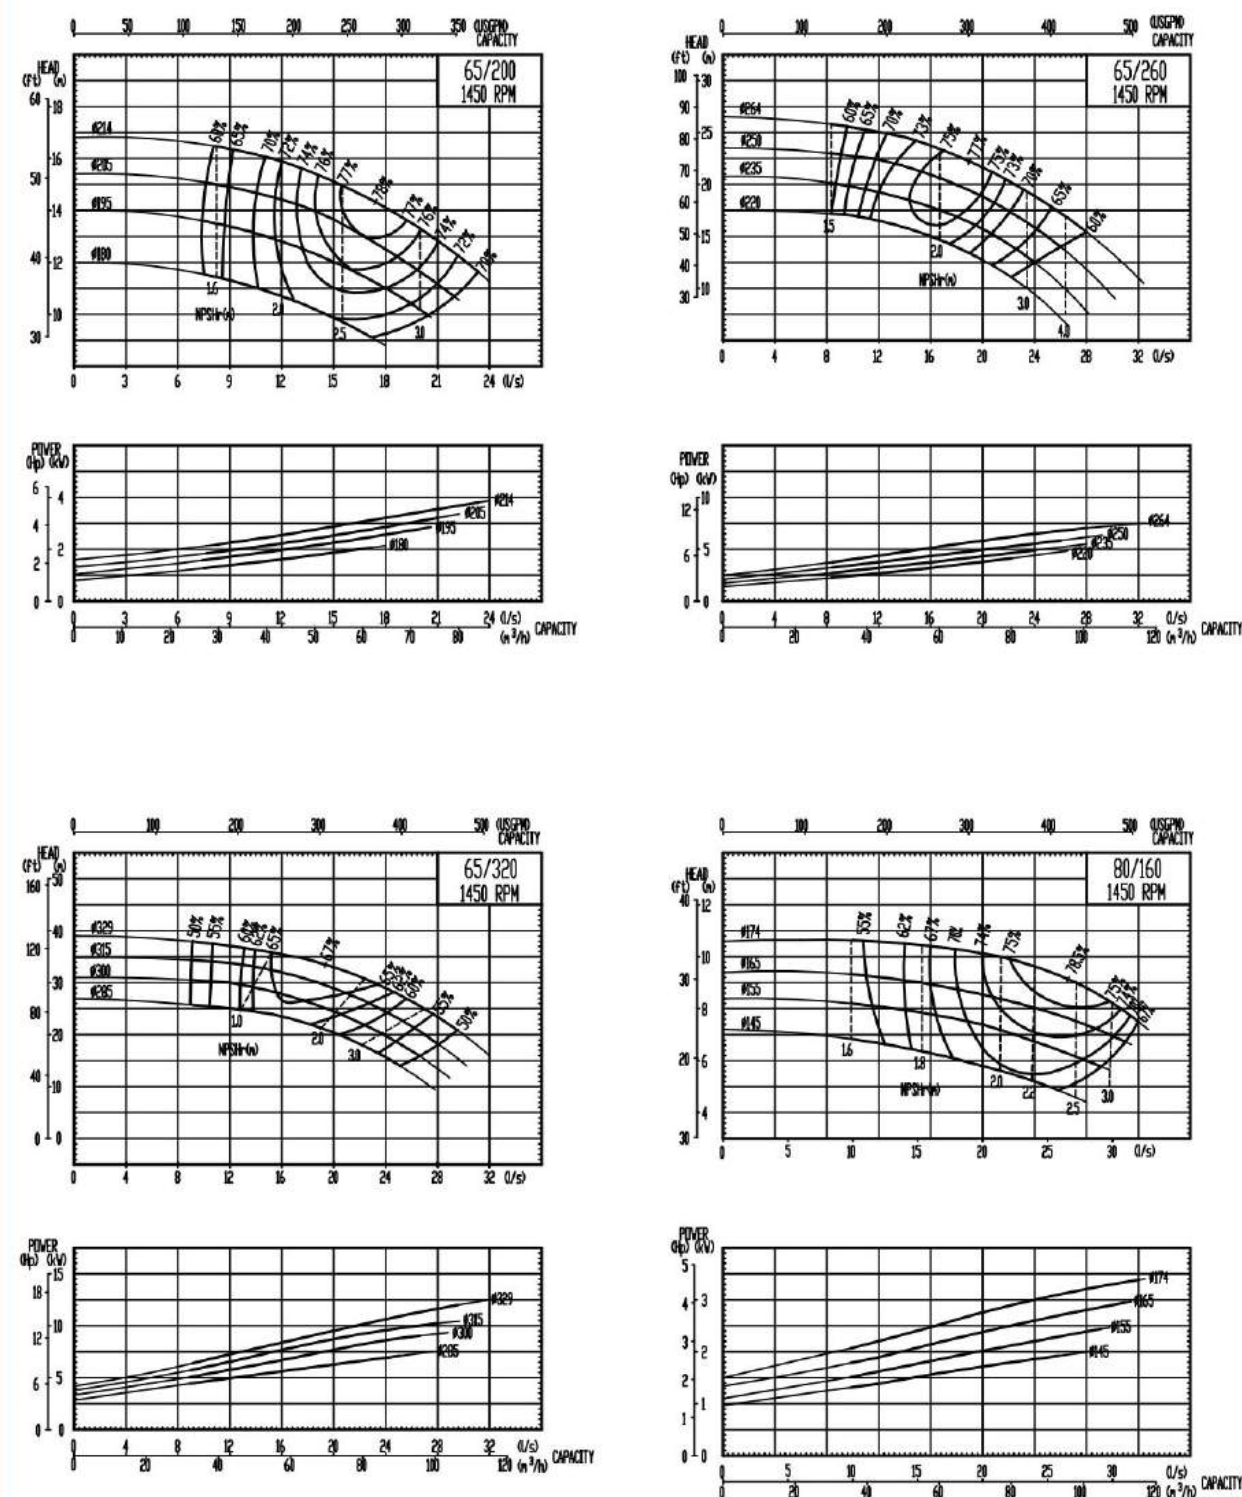

PERFORMANCE CURVES (4-pole)

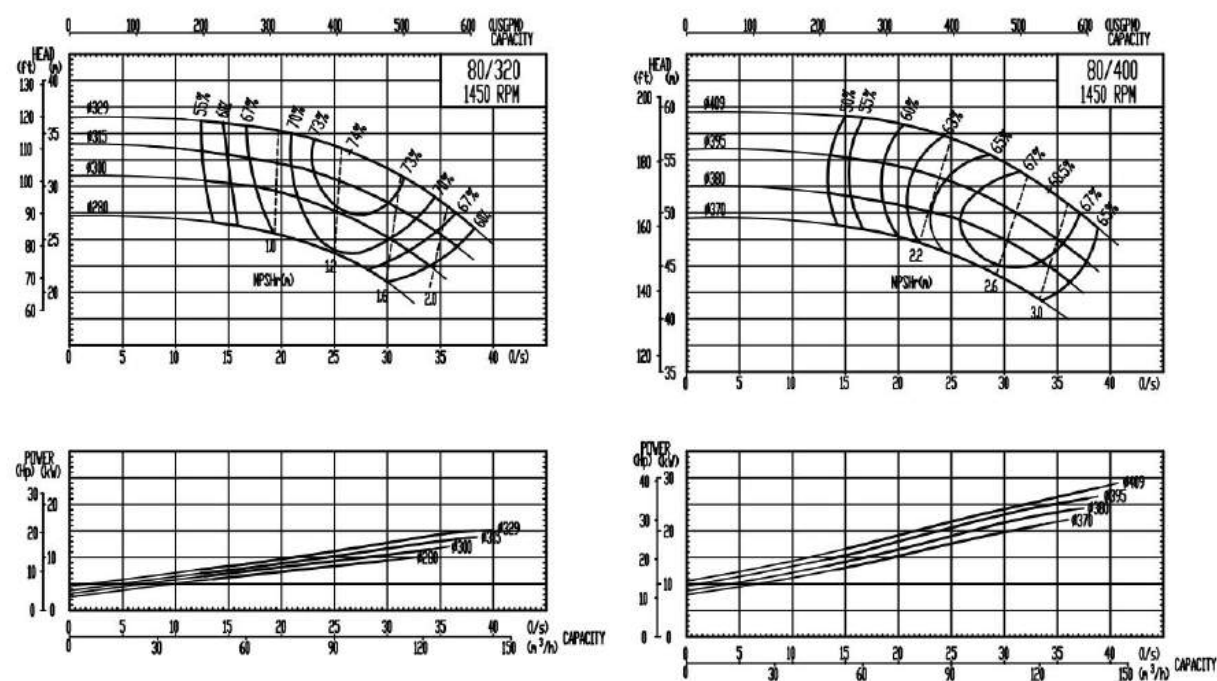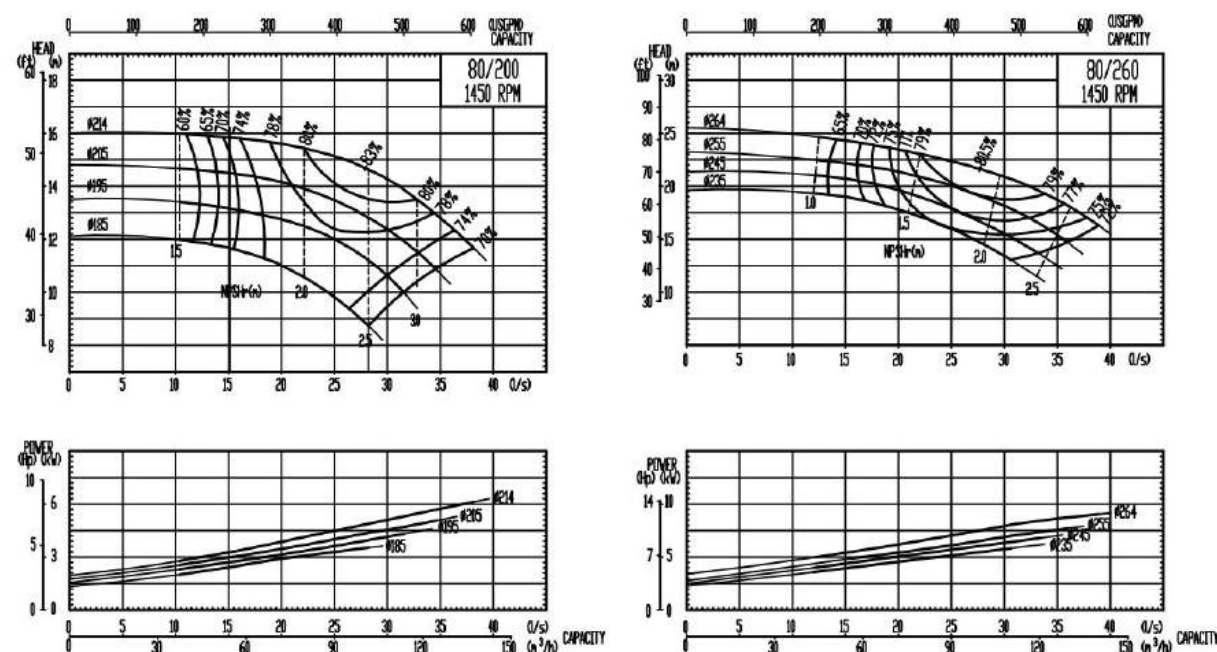


PERFORMANCE CURVES (4-pole)


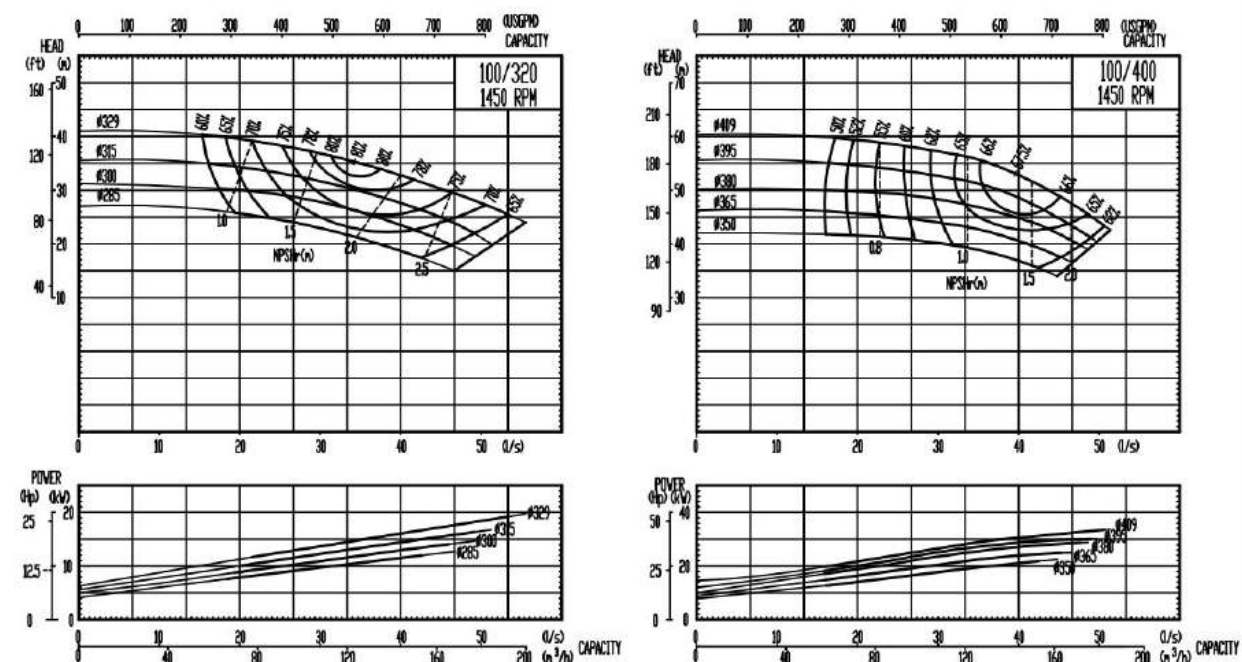
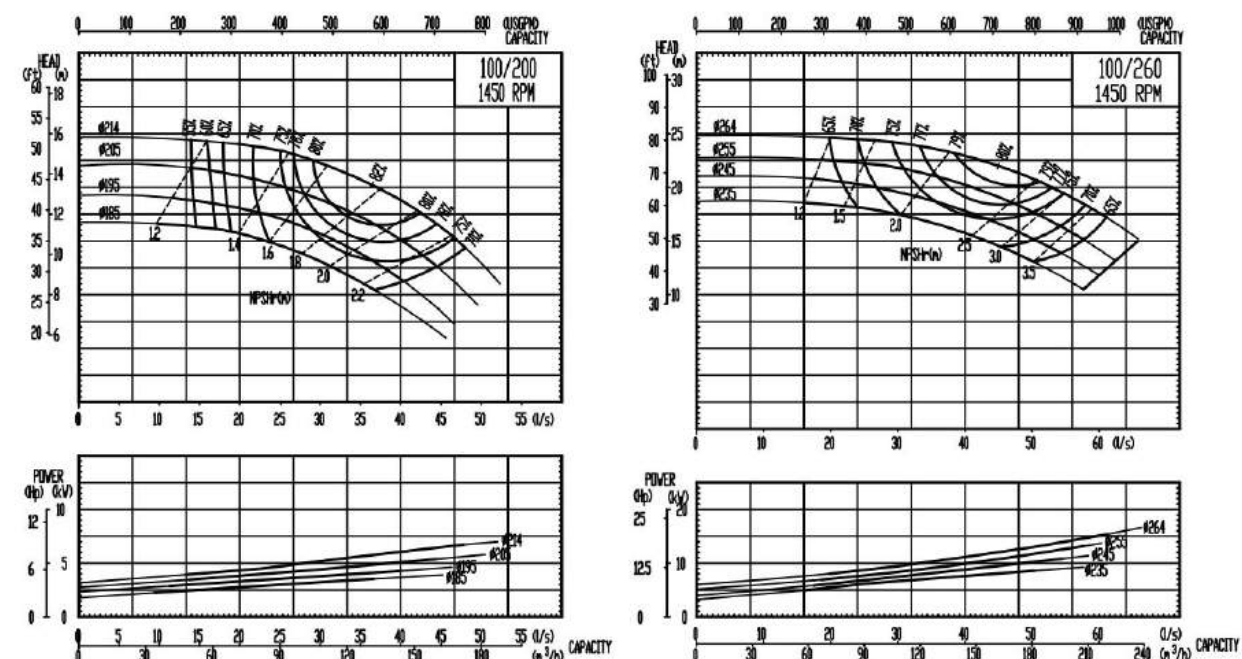




PERFORMANCE CURVES (4-pole)


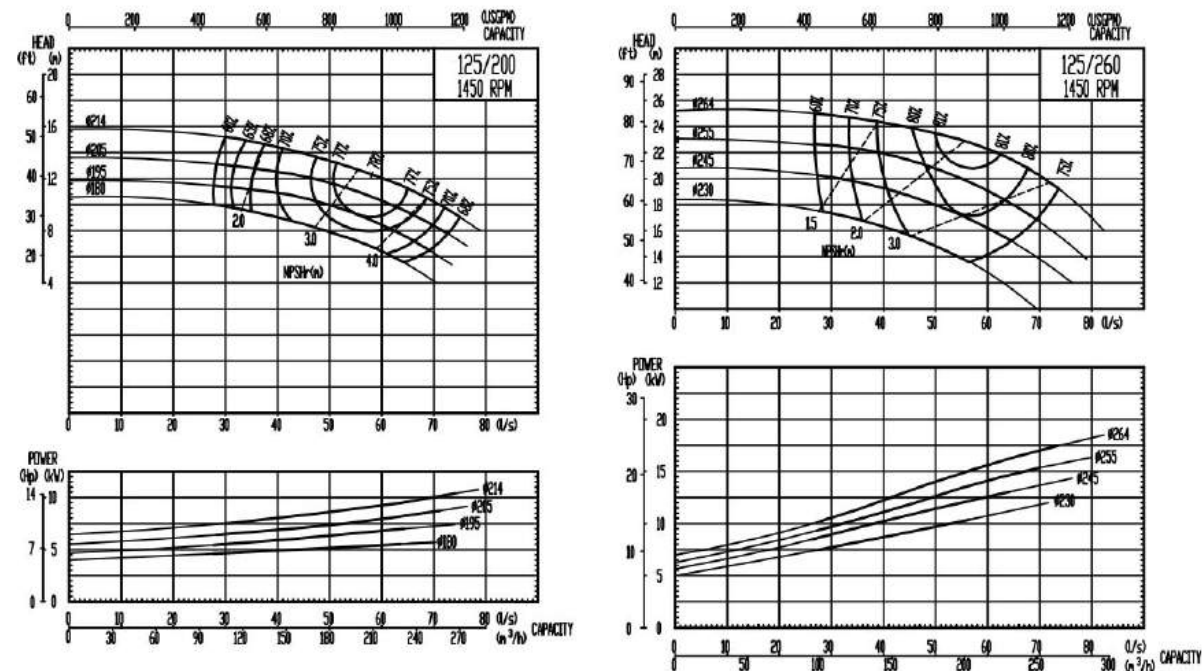


PERFORMANCE CURVES (4-pole)

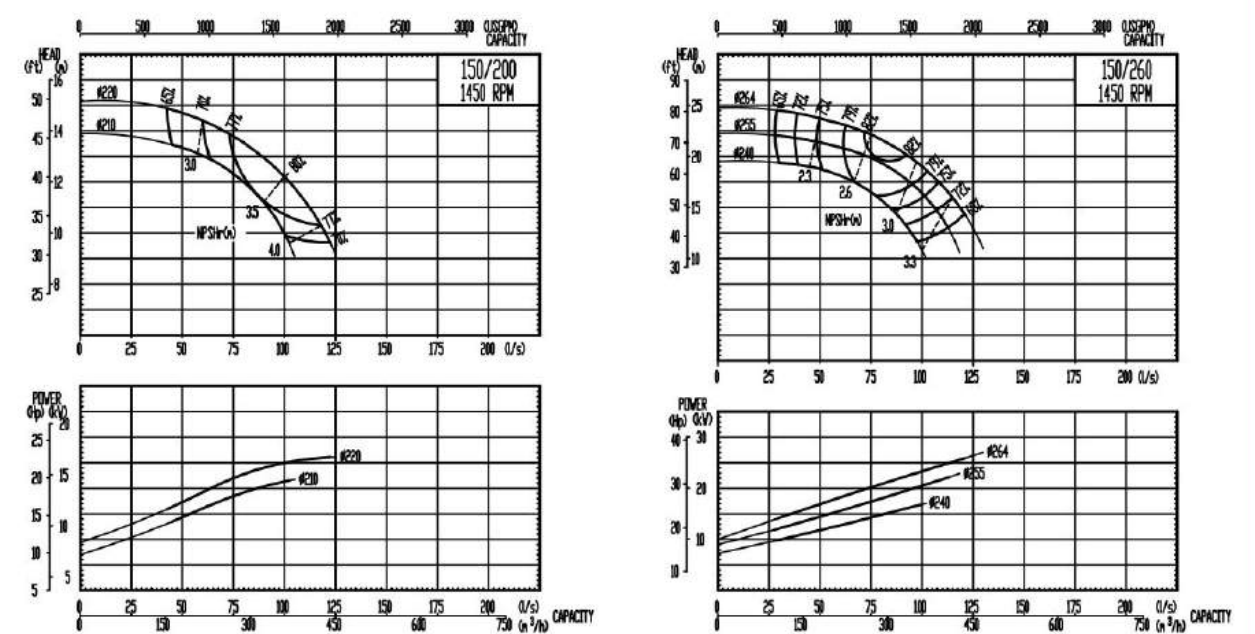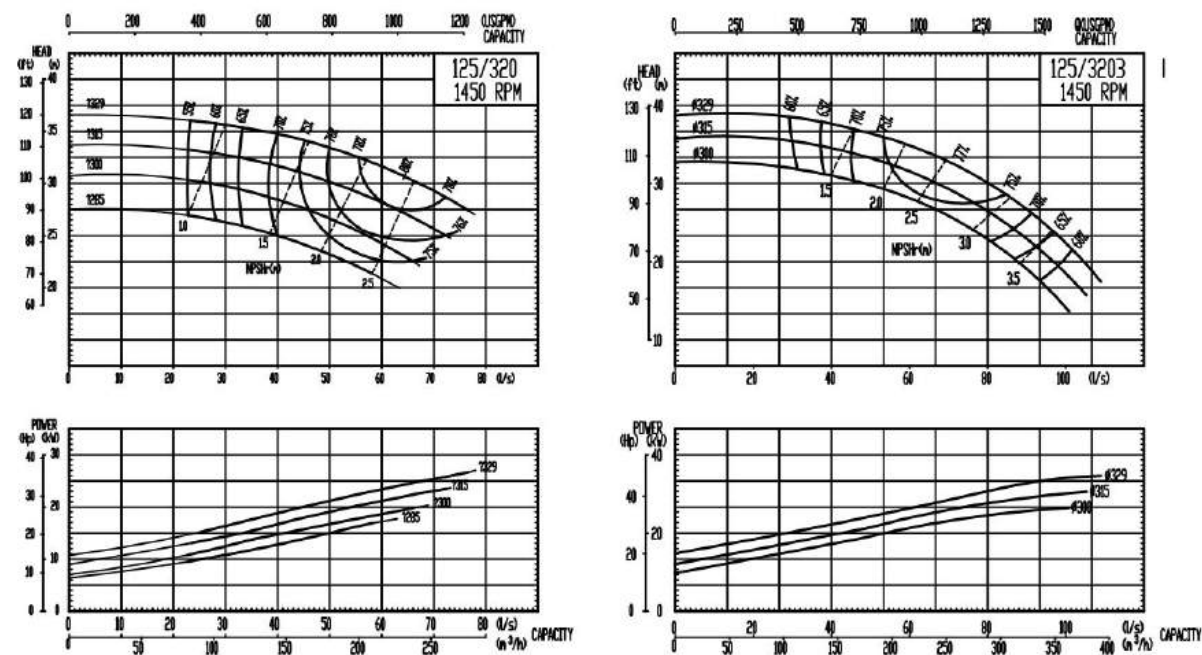
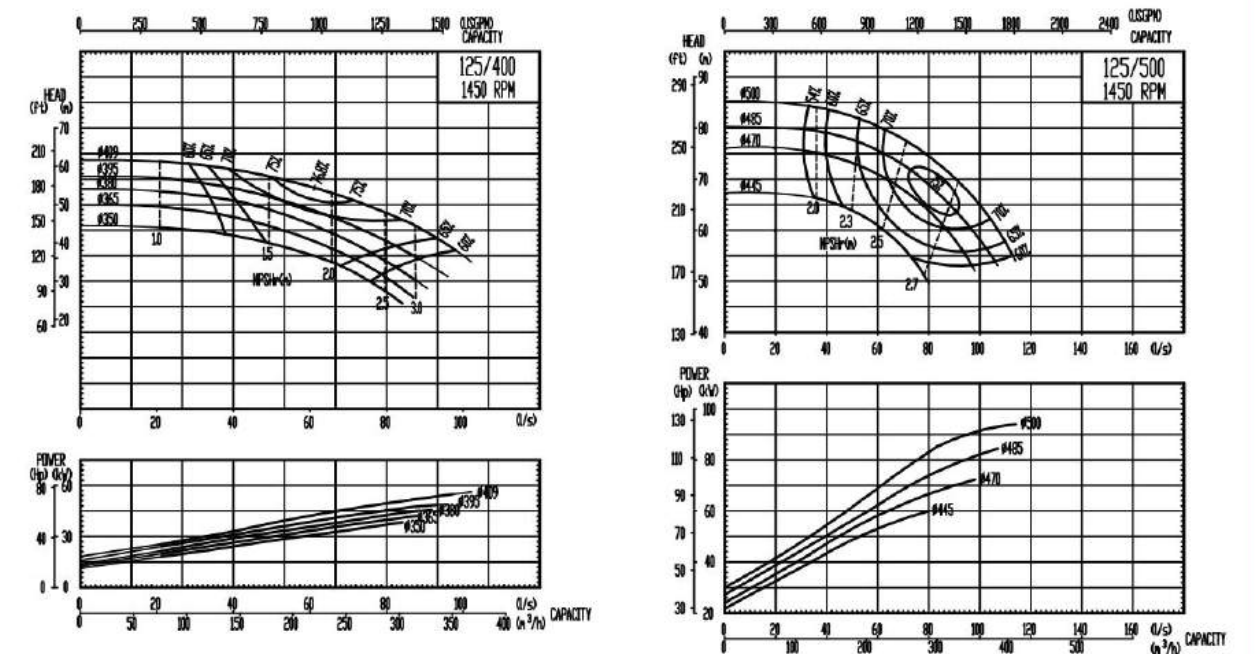




PERFORMANCE CURVES (4-pole)

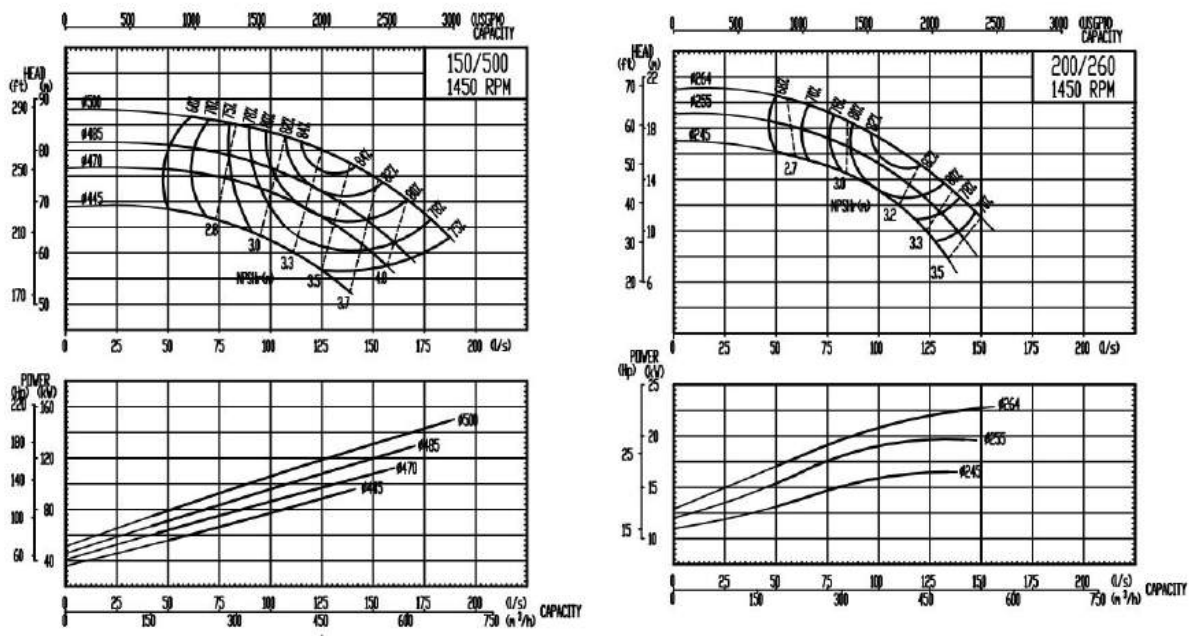
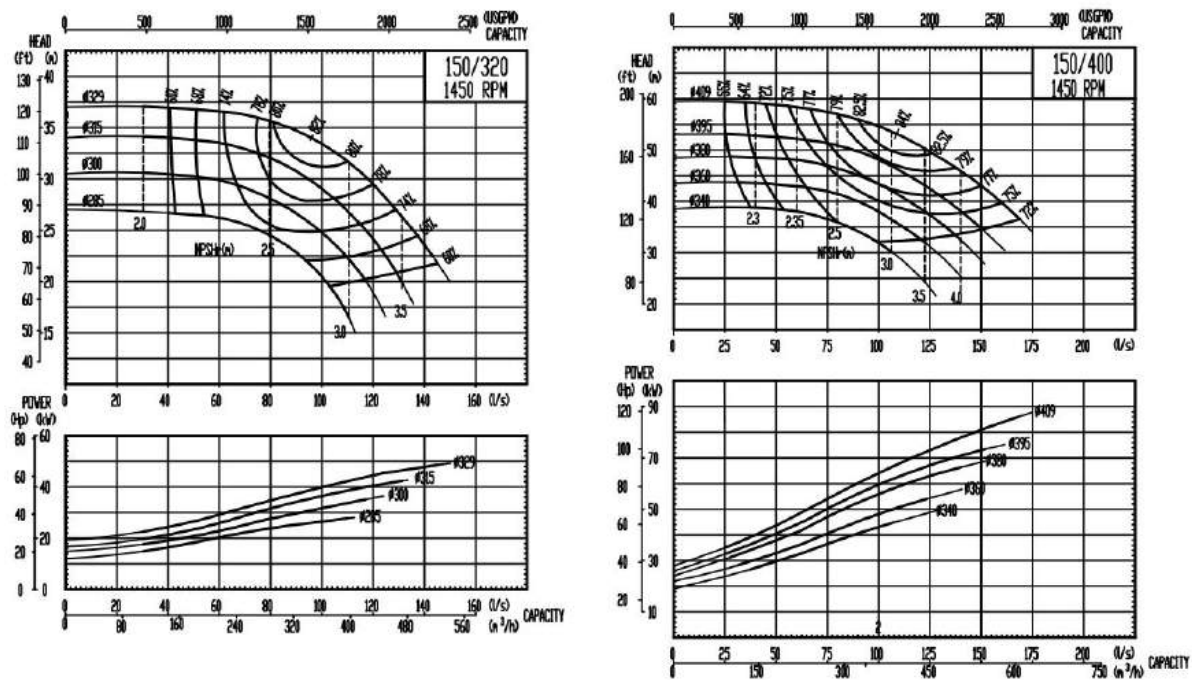


PERFORMANCE CURVES (4-pole)

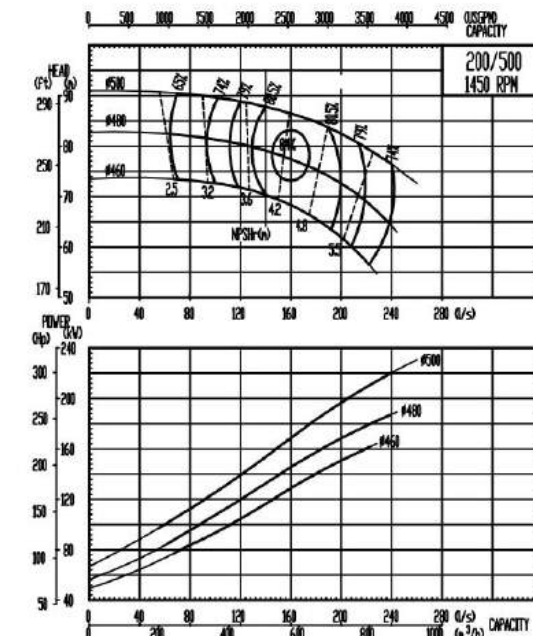
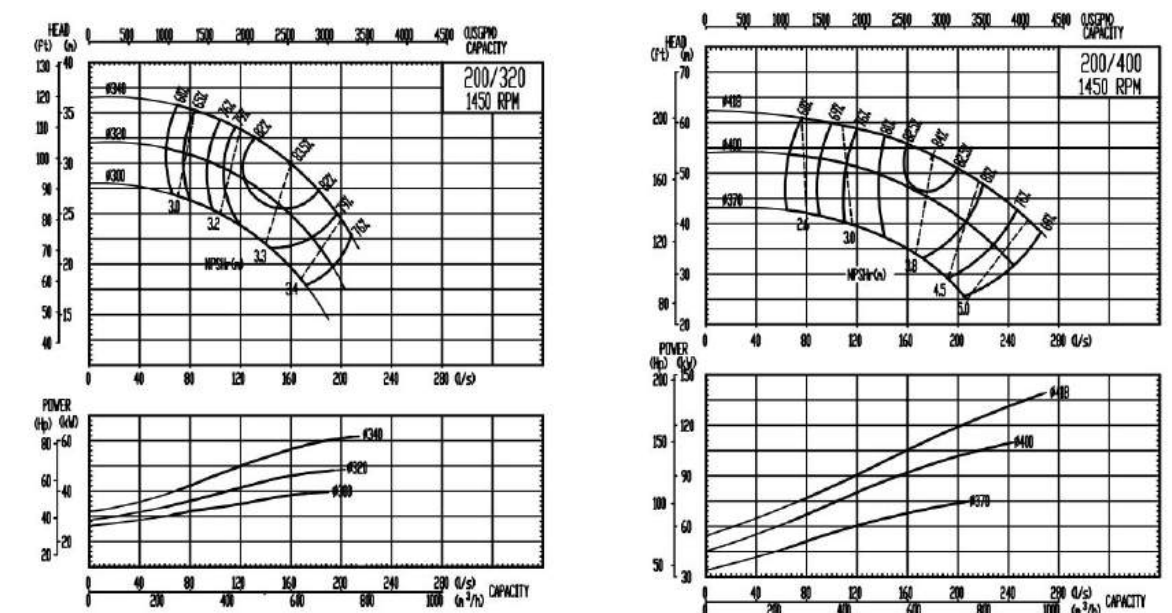




PERFORMANCE CURVES (2-pole)



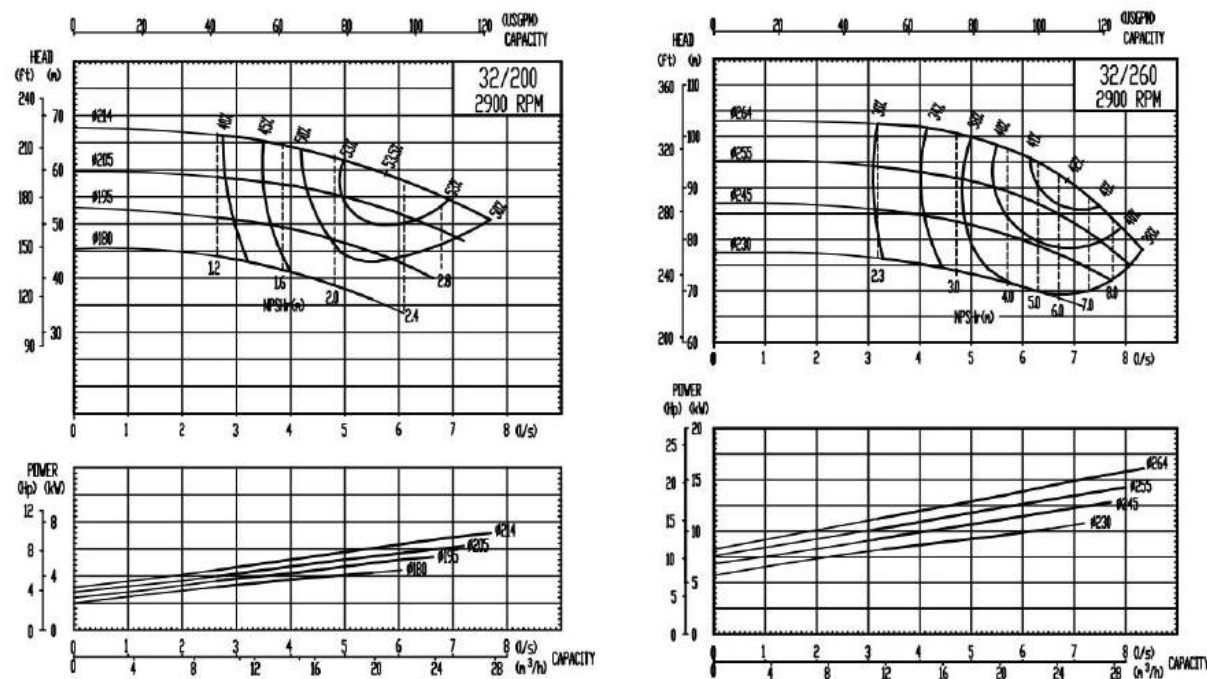
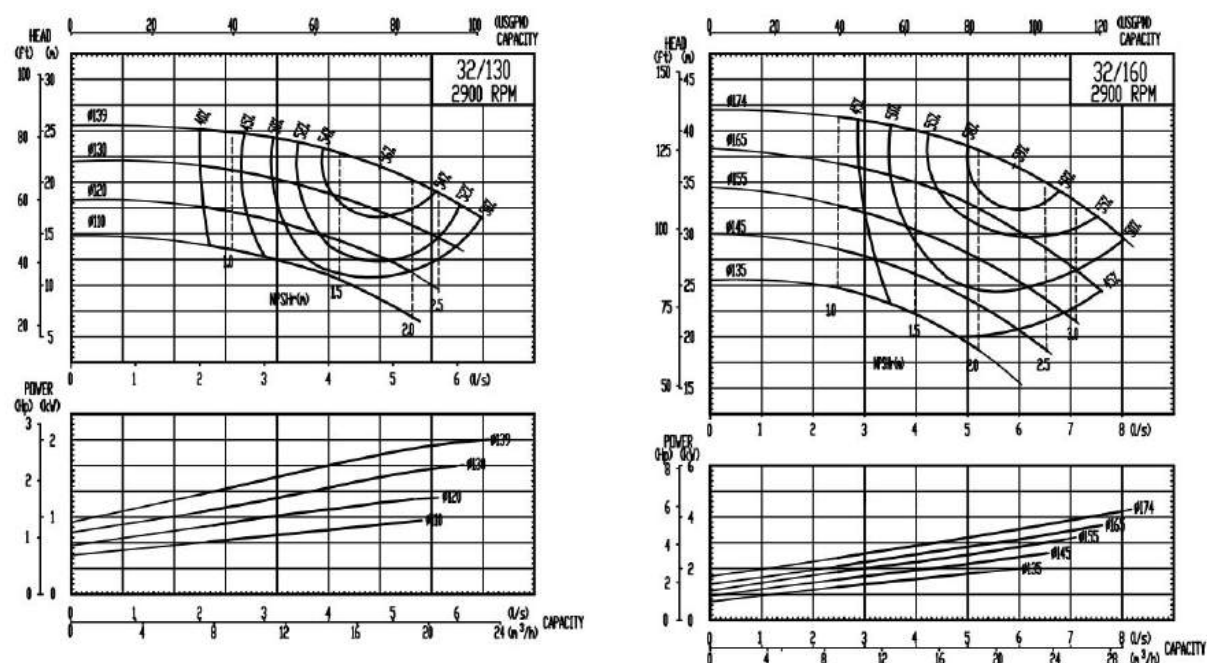


PERFORMANCE CURVES (2-pole)



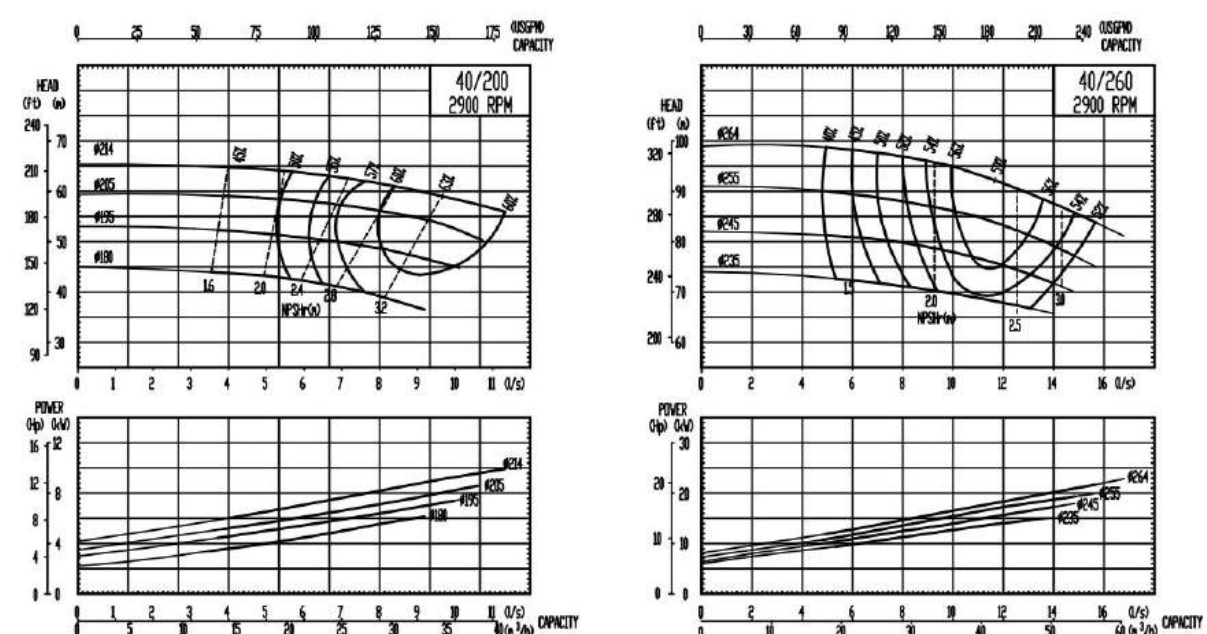
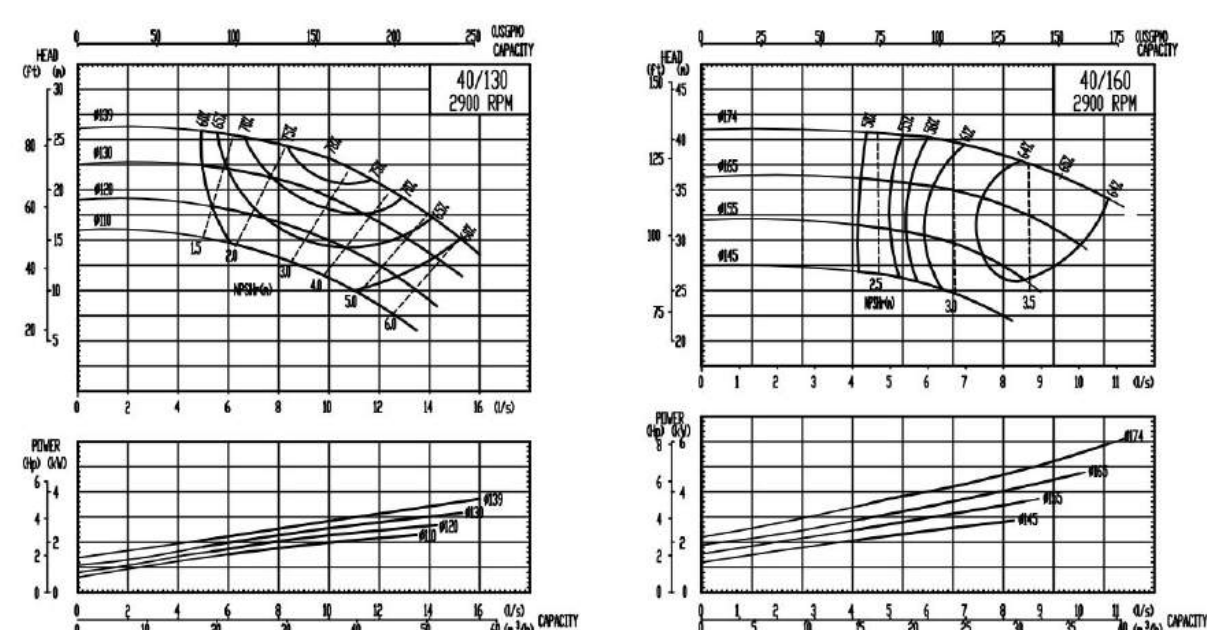






PERFORMANCE CURVES (2-pole)

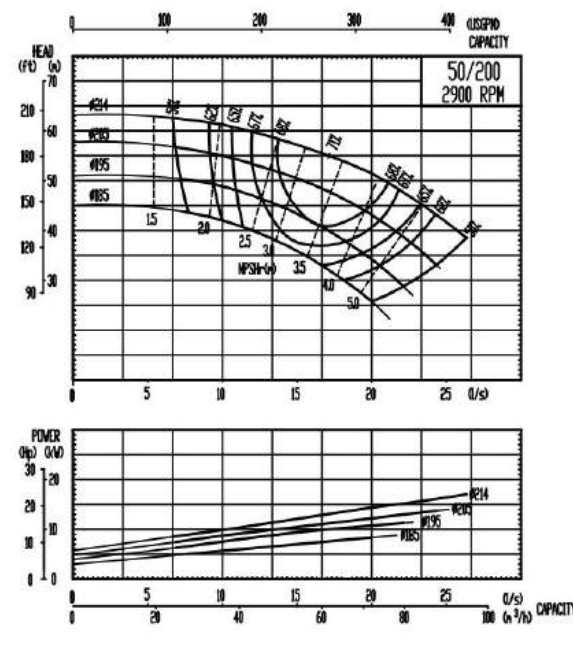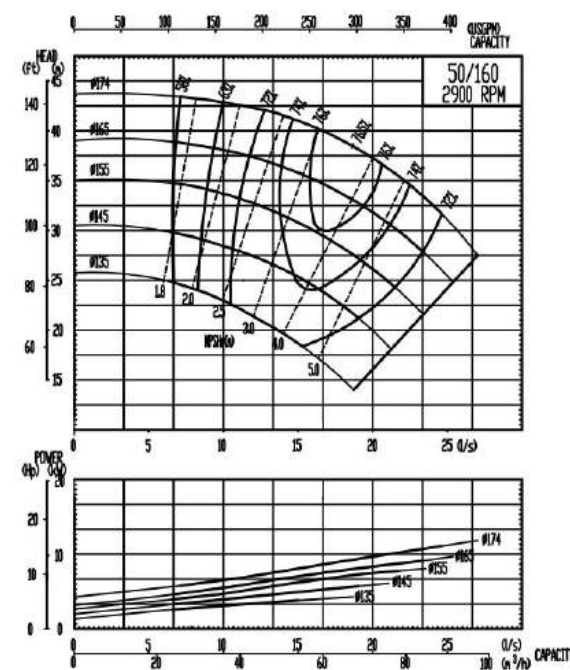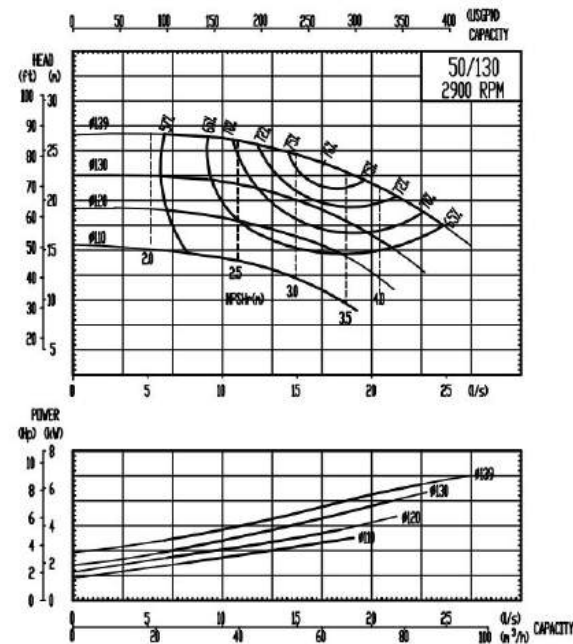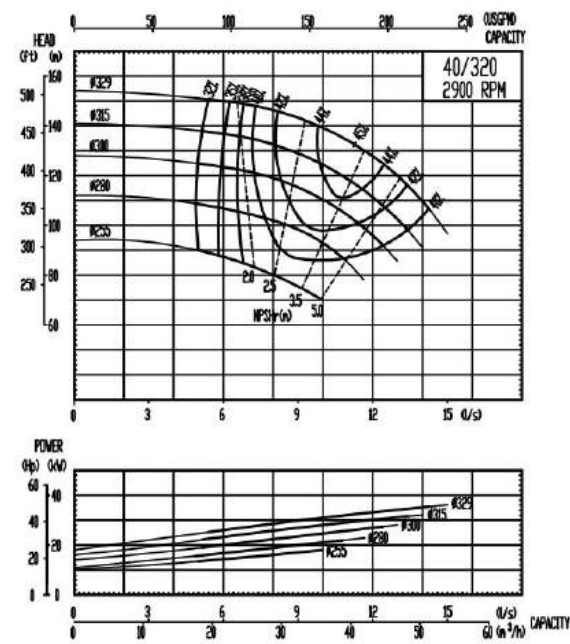



PERFORMANCE CURVES (2-pole)

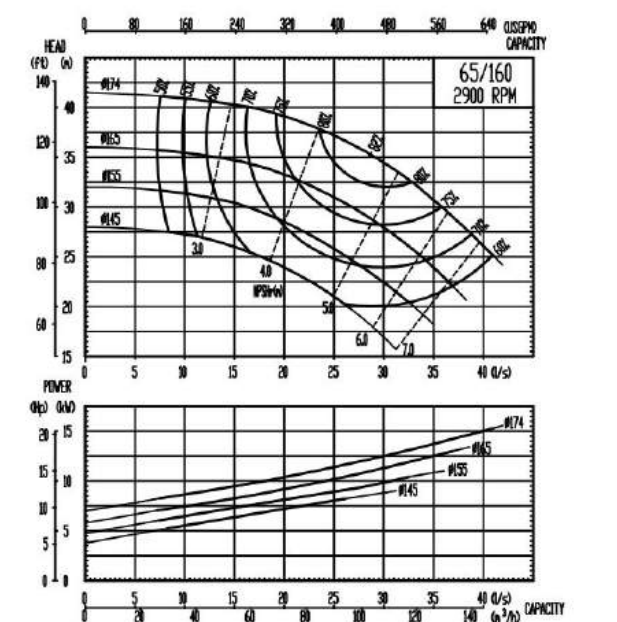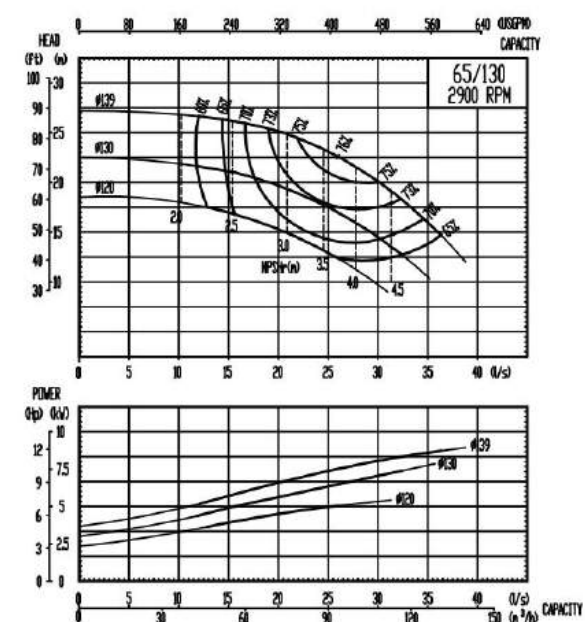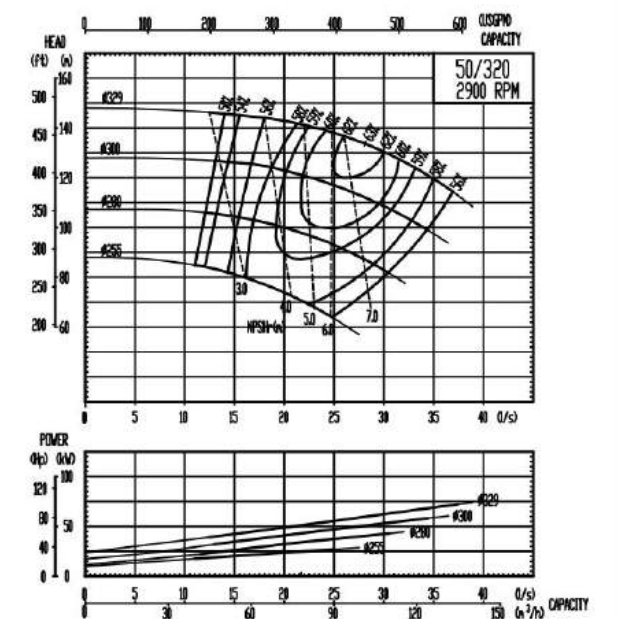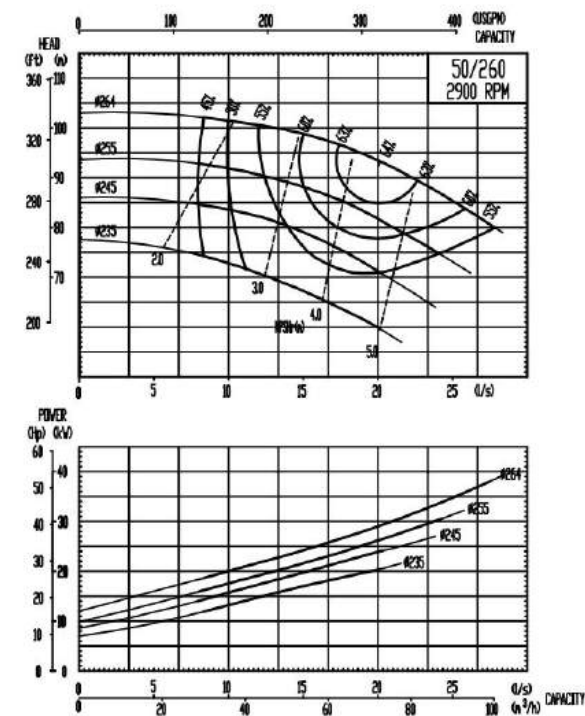

PERFORMANCE CURVES (2-pole)

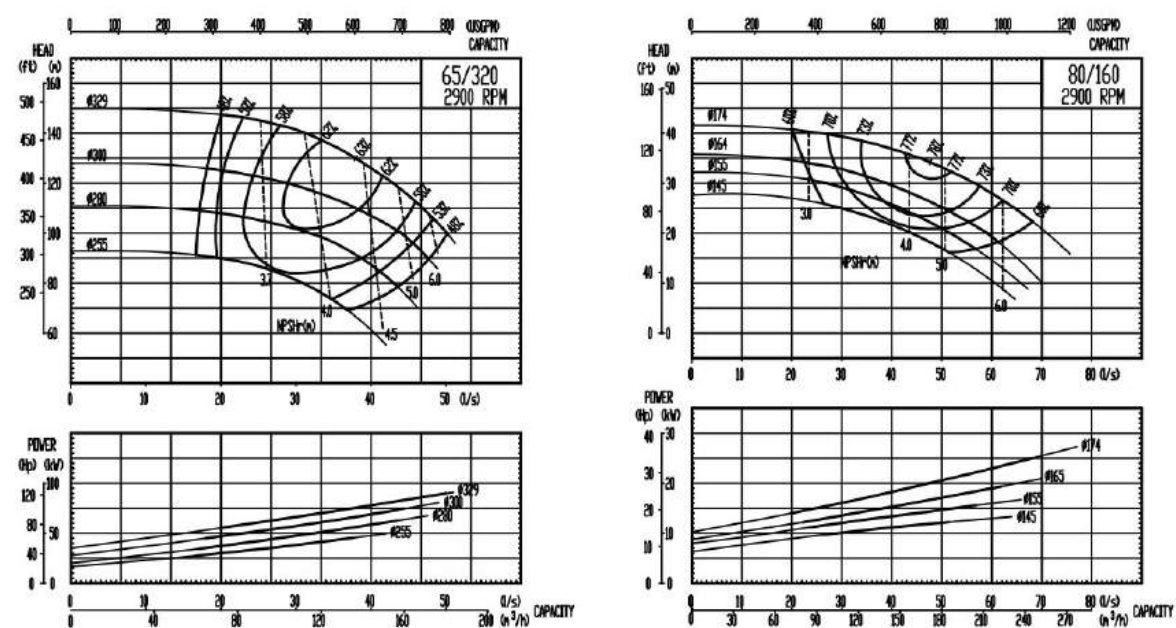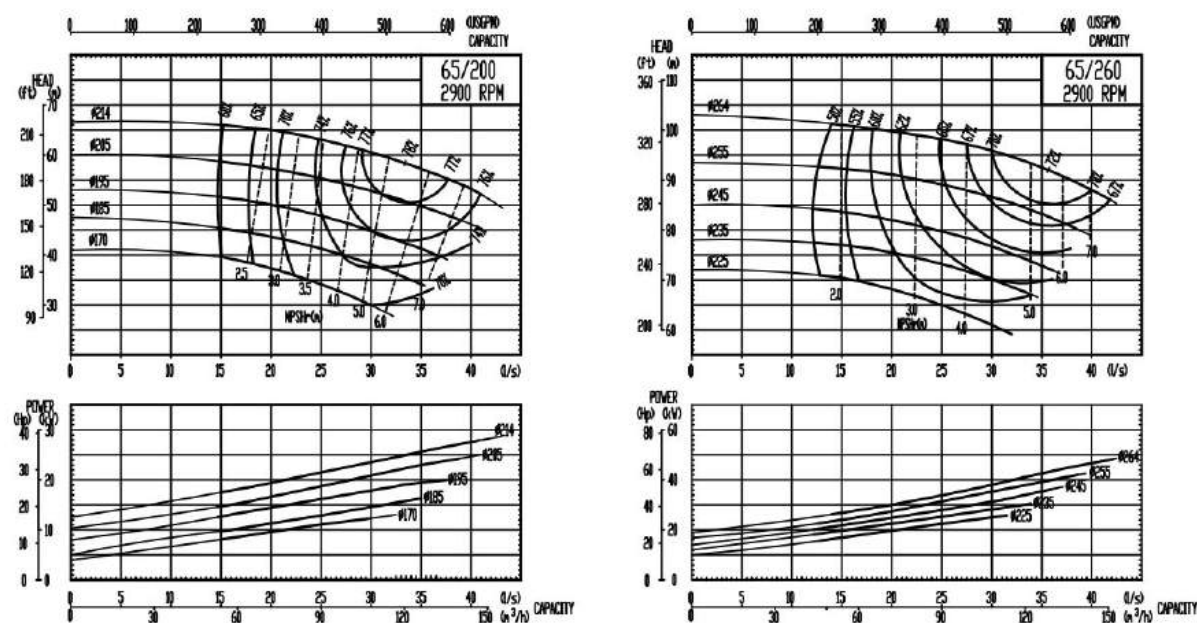


PERFORMANCE CURVES (2-pole)

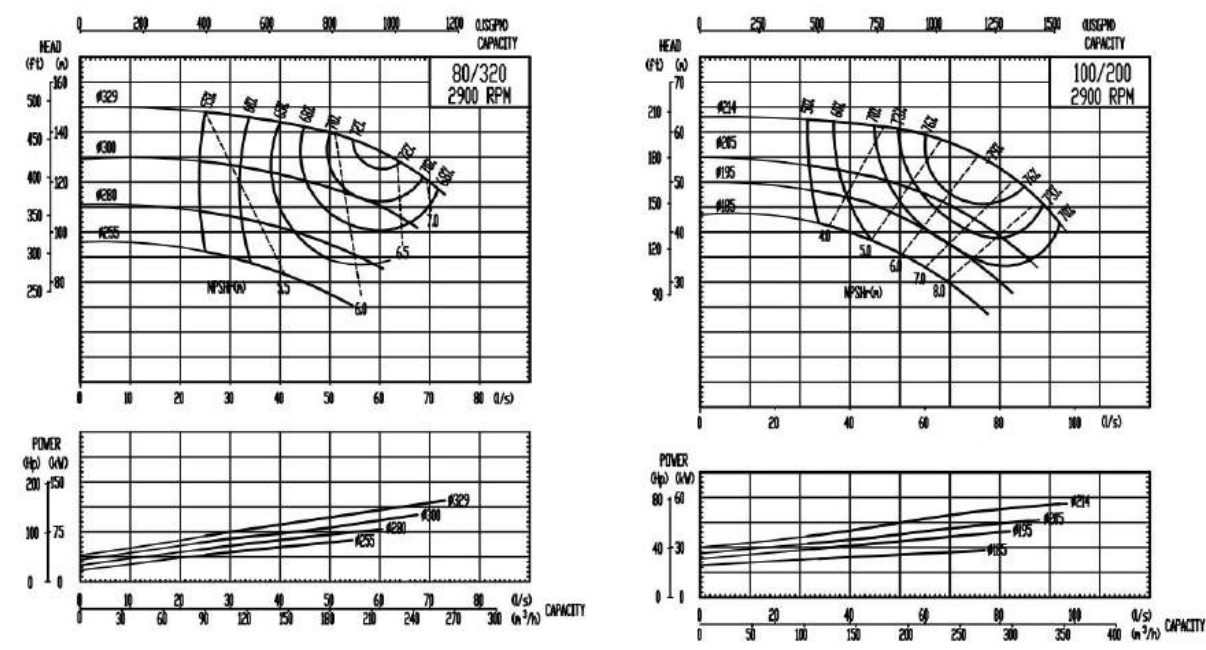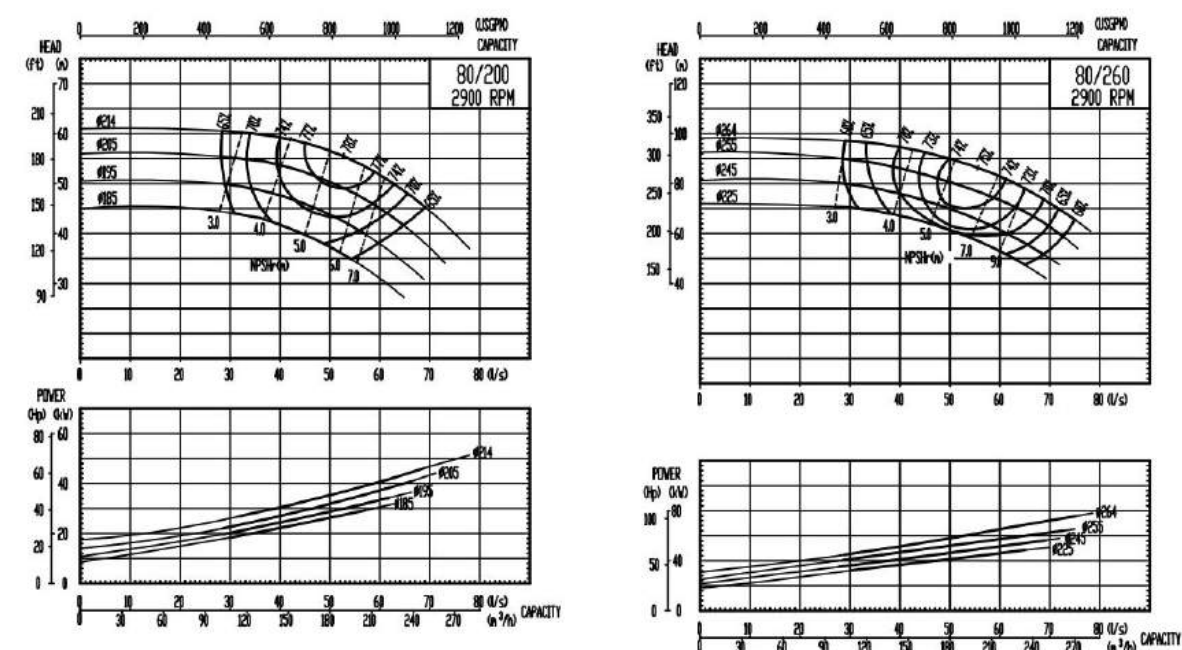




PERFORMANCE CURVES (2-pole)

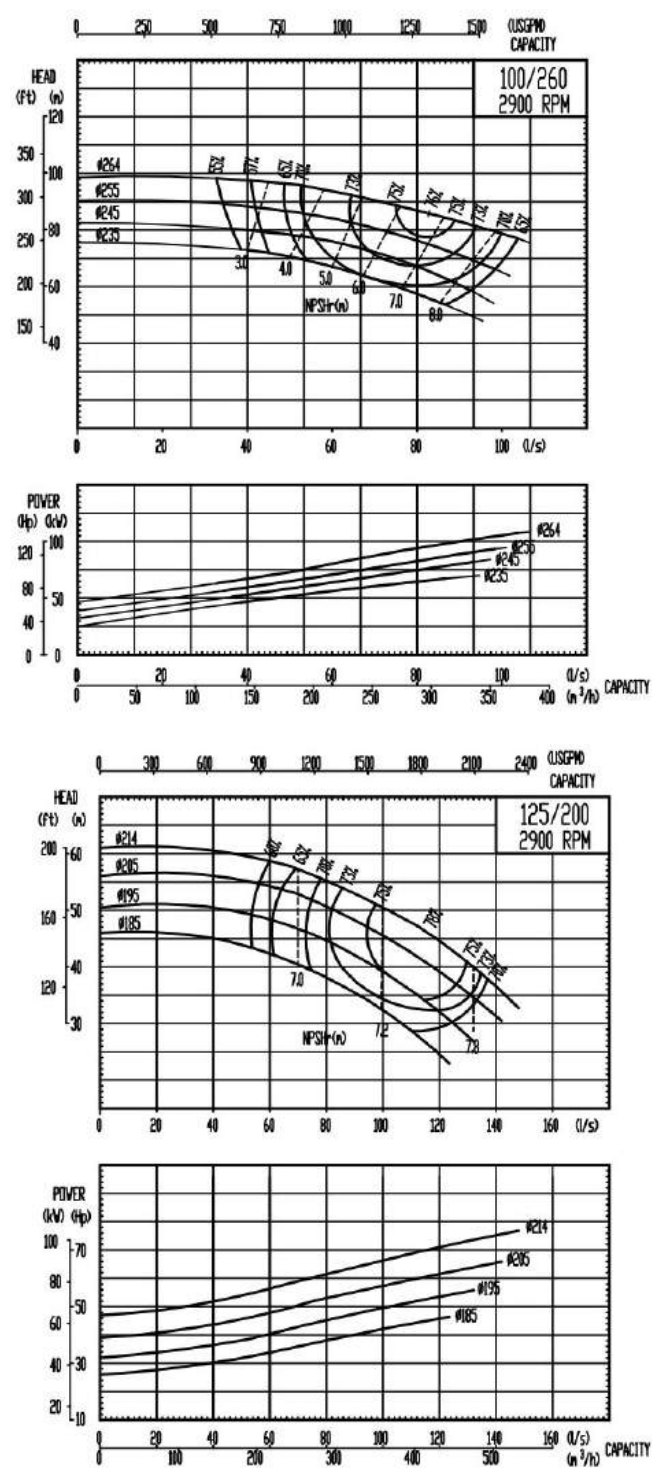




Outline dimension 外形尺寸 SV-JAI

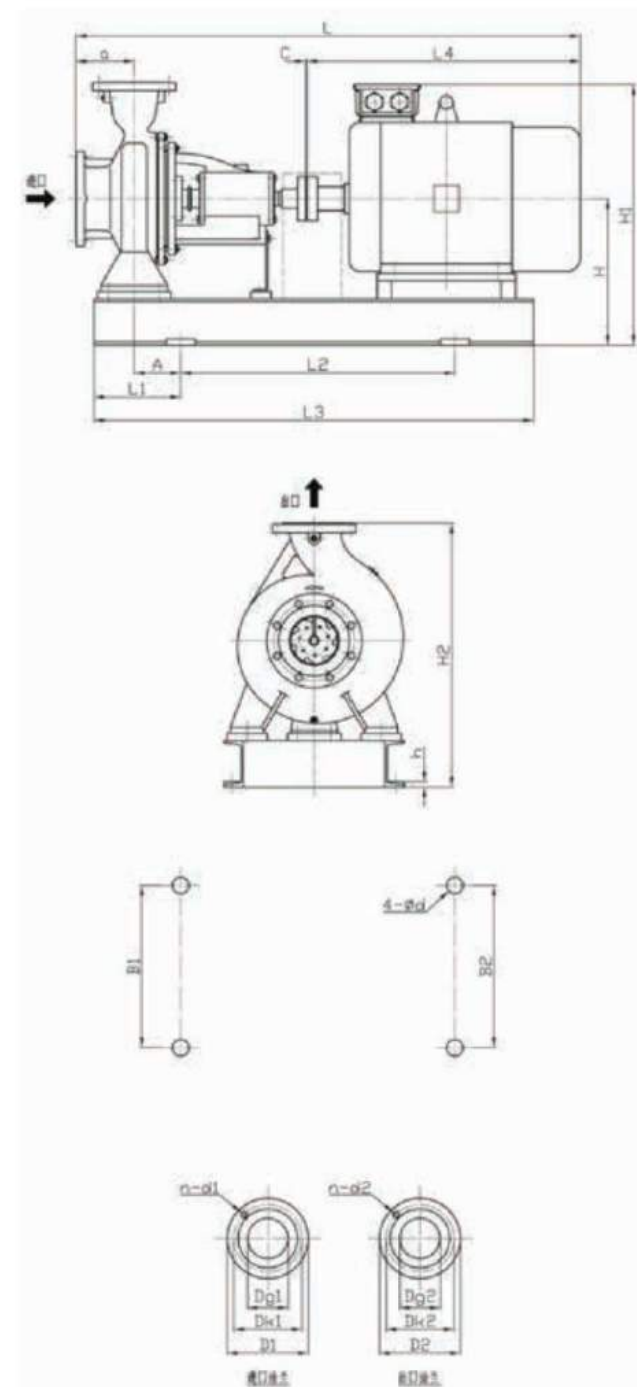

泵型号 Model	配套电机 Motor	安装尺寸 Installing Dimensions													进口法兰 Inlet Flange			出口法兰 Disch. Flange						
		a	L	A	L1	L2	L3	L4	B1	B2	H	H1	H2	c	h	d	Dg1	Dk1	D1	n-d1	Dg2	Dk2	D2	n-d2
32/130	Frame																							
	Y90S-2	80	737	57	127	400	658	295	235	235	187	327	327	2	16	φ19								
	Y90L-2	1.5	80	762	57	127	450	675	320	225	225	187	357	327	2	16	φ19							
	Y100L-2	2.2	80	787	57	127	450	700	345	225	225	202	372	342	2	16	φ19	φ50	φ125	φ165	4-φ18	φ32	φ100	φ140
	Y112M-2	3	80	832	55	125	450	734	390	215	215	187	357	327	2	16	φ19	φ50	φ125	φ165	4-φ18	φ32	φ100	φ140
32/160	Y112M-2	4	80	862	57	127	450	745	420	235	235	204	392	344	2	16	φ19							
	Y90L-2	2.2	80	787	57	127	450	705	345	250	250	224	394	384	2	16	φ19							
	Y112M-2	3	80	832	67	137	450	741	390	235	235	254	394	384	2	16	φ19							
	Y132S-2	5.5/7.5	80	907	77	147	500	784	465	285	285	254	412	384	2	16	φ19	φ50	φ125	φ165	4-φ18	φ32	φ100	φ140
	Y80M-4	0.55	80	737	50	120	450	657	295	225	225	207	347	367	2	16	φ19	φ50	φ125	φ165	4-φ18	φ32	φ100	φ140
32/200	Y90S-4	1.1	80	762	57	127	450	674	320	250	250	224	394	384	2	16	φ19							
	Y132S-2	5.5/7.5	80	907	61	131	500	784	465	285	285	235	448	415	2	16	φ19							
	Y160M-2	11	80	1092	90	160	580	945	650	325	325	252	512	432	2	16	φ19	φ50	φ125	φ165	4-φ18	φ32	φ100	φ140
	Y90S-4	1.1	80	762	51	121	450	675	320	280	280	235	405	415	2	16	φ19							






Outline dimension 外形尺寸 SV-JAI

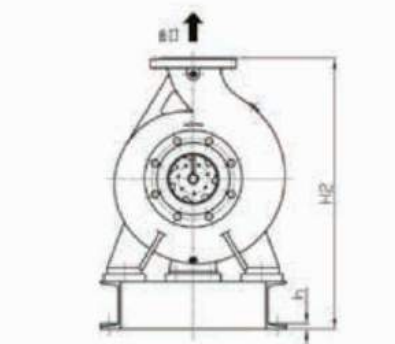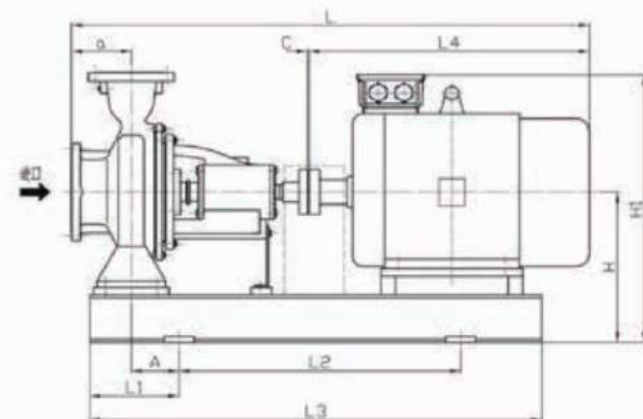

泵型号 Model	配套电机 Motor		安装尺寸 Installing Dimensions												进口法兰 Suc. Flange			出口法兰 Disch. Flange							
	机座号 Frame	功率 Power(kW)	a	L	A	L1	L2	L3	L4	B1	B2	H	H1	H2	c	h	d	Dg1	Dk1	D1	n-d1	Dg2	Dk2	D2	n-d2
32/280	Y160M-2	11/15	100	1112	87.5	170	580	955	650	325	325	272	532	497	2	16	φ19								
	Y180L-2	18.5	100	1142	87.5	170	580	1000	680	325	325	272	532	497	2	16	φ19								
	Y180M-2	22	100	1147	117.5	200	580	975	685	350	350	272	547	497	2	16	φ19								
	Y90L-4	1.5	100	807	87.5	170	350	710	345	315	315	272	442	497	2	16	φ19								
	Y100L-4	2.2/3	100	852	67.5	150	450	745	390	315	315	272	442	497	2	16	φ19								
40/130	Y112M-4	4	100	882	72.5	155	450	755	420	315	315	272	480	497	2	16	φ19								
	Y132S-4	5.5	100	927	77	159.5	500	804.5	465	315	315	255	488	480	2	16	φ19								
	Y132M-4	7.5	100	967	77	159.5	500	845	505	315	315	255	488	480	2	16	φ19								
	Y90L-2	2.2	80	787	65	135	430	700	345	225	225	204	374	344	2	16	φ19								
	Y100L-2	3	80	832	67	137	450	736	390	225	225	204	374	344	2	16	φ19								
40/160	Y112M-2	4	80	862	83	153	450	750	420	255	255	190	378	330	2	16	φ19								
	Y80M-4	0.55	80	737	67	137	400	660	285	225	225	187	327	327	2	16	φ19								
	Y90L-2	2.2	80	787	57	127	450	705	345	250	250	224	394	384	2	16	φ19								
	Y100L-2	3	80	832	67	137	450	741	390	255	255	224	394	384	2	16	φ19								
	Y132S-2	5.5/7.5	80	862	67	137	450	745	420	255	255	224	412	384	2	16	φ19								
40/180	Y112M-2	4	80	907	77	147	500	794	465	285	285	224	437	384	2	16	φ19								
	Y90S-4	1.1	80	762	57	127	450	674	320	250	250	224	394	384	2	16	φ19								




Outline dimension 外形尺寸 SV-JAI

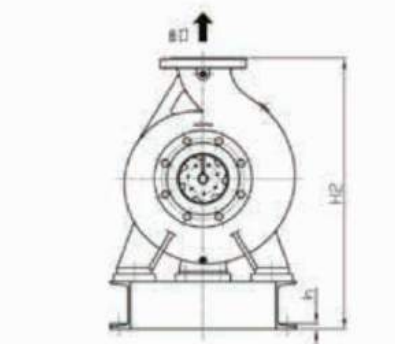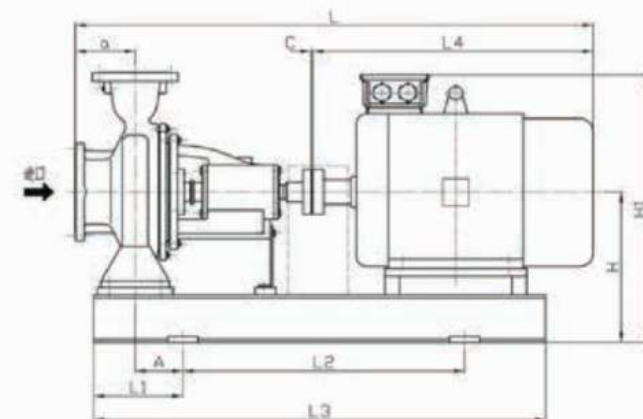

泵型号 Model	配套电机 Frame	功率 Power(kW)	安装尺寸 Installing Dimensions												进口法兰 Suc. Flange			出口法兰 Disch. Flange							
			a	L	A	L1	L2	L3	L4	B1	B2	H	H1	H2	c	h	d	Dg1	Dk1	D1	n-d1	Dg2	Dk2	D2	n-d2
40/200	Y132S-2	5.5/7.5	100	927	77.5	147.5	500	794	465	285	285	252	465	432	2	16	φ19								
	Y160M-2	11/15	100	1112	90	160	580	945	650	325	325	252	512	432	2	16	φ19								
	Y90L-4	1.5	100	807	51	121	450	700	345	278	278	235	405	415	2	16	φ19								
	Y100L-4	2.2/3	100	852	69	139	450	736	390	285	285	235	405	415	2	16	φ19								
	Y160M-2	11/15	100	1112	87.5	170	580	955	650	325	325	252	532	497	2	16	φ19								
40/250	Y180L-2	18.5	100	1142	87.5	170	580	1000	680	325	325	272	532	497	2	16	φ19								
	Y180M-2	22	100	1147	117.5	200	580	975	685	350	350	272	547	497	2	16	φ19								
	Y90L-4	1.5	100	807	87.5	170	350	710	345	315	315	272	442	497	2	16	φ19								
	Y100L-4	2.2/3	100	852	67.5	150	450	745	390	315	315	272	442	497	2	16	φ19								
	Y112M-4	4	100	882	72.5	155	450	755	420	315	315	272	460	497	2	16	φ19								
40/320	Y132S-4	5.5	100	927	77	159.5	500	804.5	465	315	315	255	468	480	2	16	φ19								
	Y132M-4	7.5	100	967	77	159.5	500	845	505	315	315	255	468	480	2	16	φ19								
	Y200L-2	30/37	125	1377	120.5	203	750	1160	780	395	395	342	647	592	2	16	φ24								
	Y112M-4	4	125	1017	105	187.5	580	865.5	420	350	350	292	480	542	2	16	φ19								
	Y132S-4	5.5	125	1062	105	187.5	580	914.5	465	350	350	292	505	542	2	16	φ19								
	Y132M-4	7.5	125	1102	105.5	188	580	952.5	505	350	350	292	505	542	2	16	φ19								




Outline dimension 外形尺寸 SV-JAI

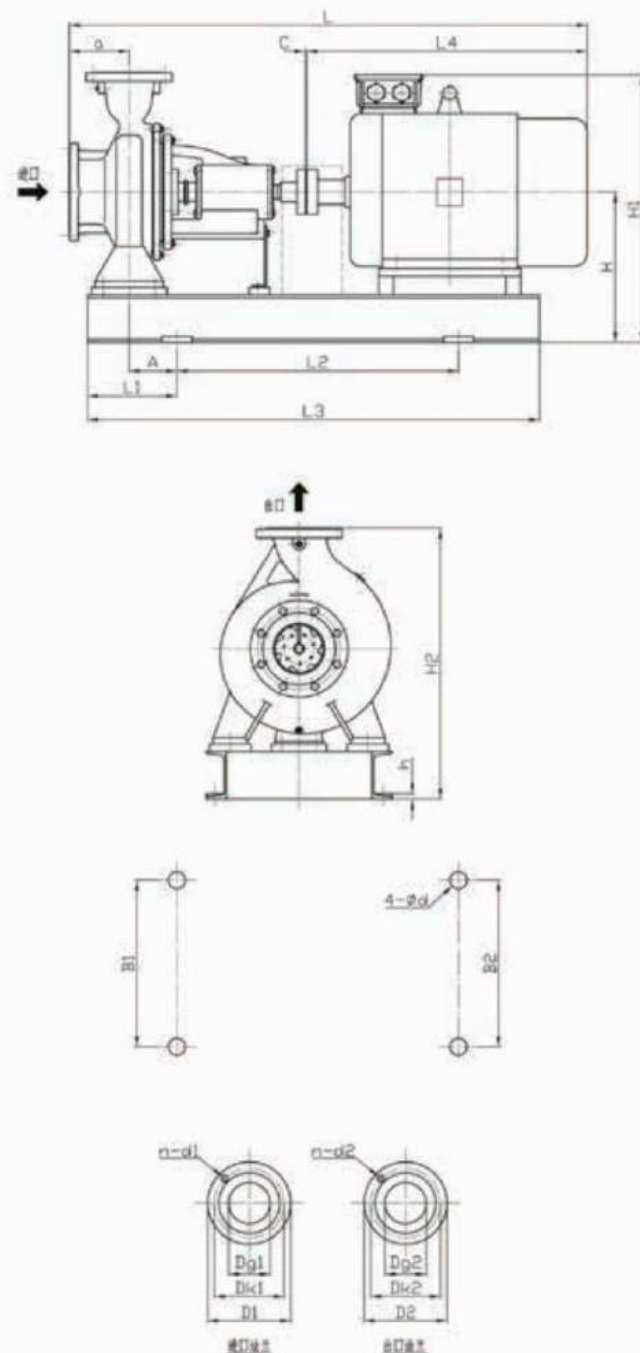

泵型号 Model	配套电机 Motor		安装尺寸 Installing Dimensions											进口法兰 Suc. Flange			出口法兰 Disch. Flange								
	机座号 Frame	功率 Power(kW)	a	L	A	L1	L2	L3	L4	B1	B2	H	H1	H2	c	h	d	Dg1	Dk1	D1	n-d1	Dg2	Dk2	D2	n-d2
50/130	Y90L-2	2.2	100	807	57	127	450	705	345	250	250	224	394	384	2	16	φ19								
	Y100L-2	3	100	852	67	137	450	741	390	255	255	224	394	384	2	16	φ19								
	Y112M-2	4	100	882	67	137	450	745	420	255	255	224	412	384	2	16	φ19								
	Y132S-2	5.5/7.5	100	927	77	147	500	794	465	285	285	224	437	384	2	16	φ19	φ65	φ145	φ185	4-φ18	φ50	φ125	φ165	4-φ18
50/160	Y80M-4	0.75	100	757	50	120	450	657	285	325	325	200	360	360	2	16	φ19								
	Y90S-4	1.1	100	782	57	127	450	674	320	250	250	224	394	384	2	16	φ19								
	Y132S-2	5.5/7.5	100	927	77.5	147.5	500	794	465	285	285	252	465	452	2	16	φ19								
	Y160M-2	0.733333	100	1112	90	160	580	945	650	325	325	252	512	432	2	16	φ19	φ65	φ145	φ185	4-φ18	φ50	φ125	φ165	4-φ18
50/200	Y90L-4	1.5	100	807	51	121	450	700	345	278	278	235	405	415	2	16	φ19								
	Y100L-4	2.2/3	100	852	69	139	450	736	390	285	285	235	405	415	2	16	φ19								
	Y132S-2	5.5/7.5	100	927	77.5	147.5	500	794	465	285	285	252	465	452	2	16	φ19								
	Y160M-2	11/15	100	1112	90	160	580	945	650	325	325	252	512	452	2	16	φ19								
50/200	Y160L-2	18.5	100	1142	90	160	590	950	680	325	325	252	512	452	2	16	φ19								
	Y180M-2	22	100	1147	90	160	580	962	685	350	350	272	547	472	2	16	φ19								
	Y200L-2	30	100	1242	130	200	600	1040	780	395	395	315	620	515	2	16	φ24	φ65	φ145	φ185	4-φ18	φ50	φ125	φ165	4-φ18
	Y90L-4	1.5	100	807	51	121	450	700	345	278	278	235	405	435	2	16	φ19								
50/260	Y100L-4	2.2/3	100	852	69	139	450	736	390	285	285	235	405	435	2	16	φ19								




Outline dimension 外形尺寸 SV-JAI

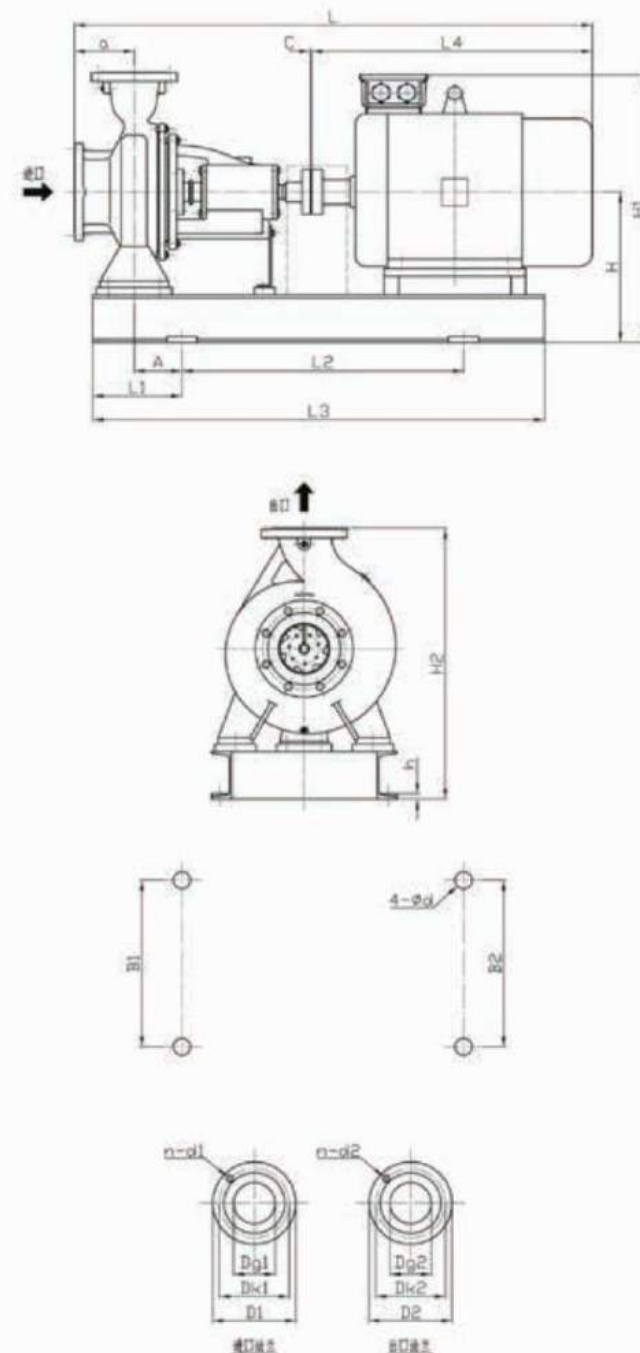

泵型号 Model	配套电机 Motor		安装尺寸 Installing Dimensions											进口法兰 Suc. Flange			出口法兰 Disch. Flange								
	机座号 Frame	功率 Power(kW)	a	L	A	L1	L2	L3	L4	B1	B2	H	H1	H2	c	h	d	Dg1	Dk1	D1	n-d1	Dg2	Dk2	D2	n-d2
50/260	Y160M-2	11/15	100	1112	87.5	170	580	955	650	325	325	272	532	497	2	16	φ19								
	Y160L-2	18.5	100	1142	87.5	170	580	1000	680	325	325	272	532	497	2	16	φ19								
	Y180M-2	22	100	1147	117.5	200	580	975	685	350	350	272	547	497	2	16	φ19								
	Y200L-2	30/37	100	1242	137.5	220	630	1050	780	395	395	310	615	535	2	16	φ24								
	Y225M-2	45	100	1272	85	220	600	1080	810	435	435	340	675	585	2	16	φ24								
	Y100L-4	2.2/3	100	852	67.5	150	450	745	390	315	315	272	442	497	2	16	φ19								
50/320	Y112M-4	4	100	882	72.5	155	450	755	420	315	315	272	460	497	2	16	φ19								
	Y132S-4	5.5	100	927	77	159.5	500	805	465	315	315	255	468	480	2	16	φ19								
	Y132M-4	7.5	100	967	77	159.5	500	845	505	315	315	255	468	480	2	16	φ19								
	Y200L-2	30/37	100	1350	129.5	212	700	1160	780	395	395	312	617	537	2	16	φ24								
	Y225M-2	45	125	1409	94	176.5	800	1189	810	440	440	341	876	821	4	16	φ24								
	Y250M-2	55	125	1519	117.5	200	820	1288	920	490	490	370	746	650	4	16	φ24								
50/320	Y280S-2	75	125	1584	92.5	175	900	1355	965	540	540	396	796	676	4	16	φ28								
	Y132S-4	5.5	125	1063	127.5	210	550	915	465	395	395	337	550	617	3	16	φ24								
	Y132M-4	7.5	125	1103	127.5	210	630	955	505	395	395	343	556	623	3	16	φ24								




Outline dimension 外形尺寸 SV-JAI

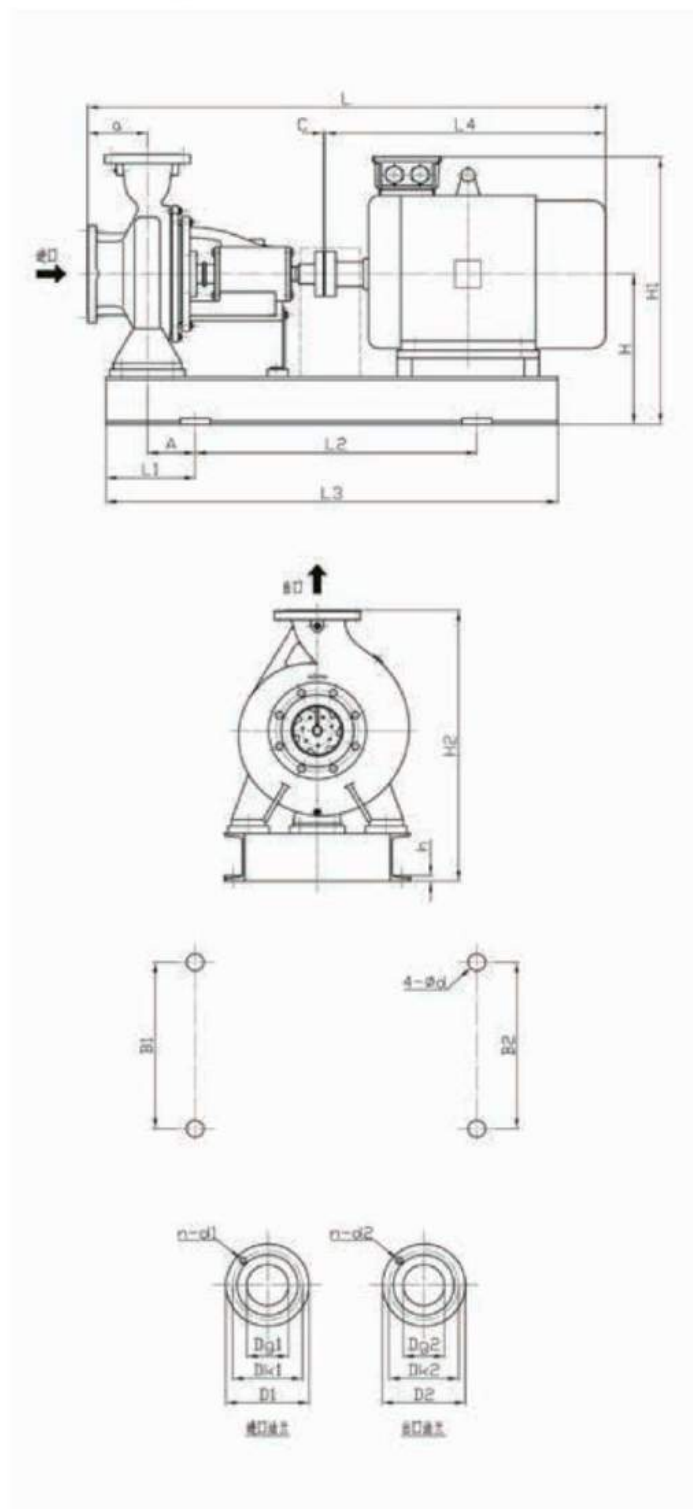

泵型号 Model	配套电机 Motor		安装尺寸														进口法兰				出口法兰				
	机座号 Frame	功率 Power(kW)	a	L	A	L1	L2	L3	L4	B1	B2	H	H1	H2	c	h	d	Dg1	Dk1	D1	n-d1	Dg2	Dk2	D2	n-d2
65/130	Y132S-2	5.5/7.5	100	927	87.5	170	500	805	485	285	285	252	485	432	2	16	φ19								
	Y160M-2	11/15	100	1112	87.5	170	580	955	650	325	325	252	512	432	2	16	φ19								
	Y180L-4	1.5	100	807	67.5	150	440	710	345	285	285	252	422	432	2	16	φ19	φ80	φ160	φ200	8-φ18	φ65	φ145	φ185	4-φ18
	Y100L-4	2.2	100	852	67.5	150	450	745	390	285	285	252	422	432	2	16	φ19								
65/160	Y112M-4	4	100	882	67.5	150	450	780	420	285	285	252	440	432	2	16	φ19								
	Y132S-2	5.5/7.5	100	927	87.5	170	500	805	465	285	285	252	465	452	2	16	φ19								
	Y160M-2	11/15	100	1112	87.5	170	580	955	650	325	325	252	512	452	2	16	φ19								
	Y160L-2	18.5	100	1142	87.5	170	580	1000	680	325	325	252	512	452	2	16	φ19	φ80	φ160	φ200	8-φ18	φ65	φ145	φ185	4-φ18
65/200	Y90L-4	1.5	100	807	67.5	150	440	710	345	285	285	252	422	452	2	16	φ19								
	Y100L-4	2.2	100	852	67.5	150	450	745	390	285	285	252	422	452	2	16	φ19								
	Y112M-4	4	100	882	67.5	150	450	756	420	285	285	252	440	452	2	16	φ19								
	Y160M-2	11/15	100	1112	87.5	170	580	955	650	325	325	252	512	452	2	16	φ19								




Outline dimension 外形尺寸 SV-JAI

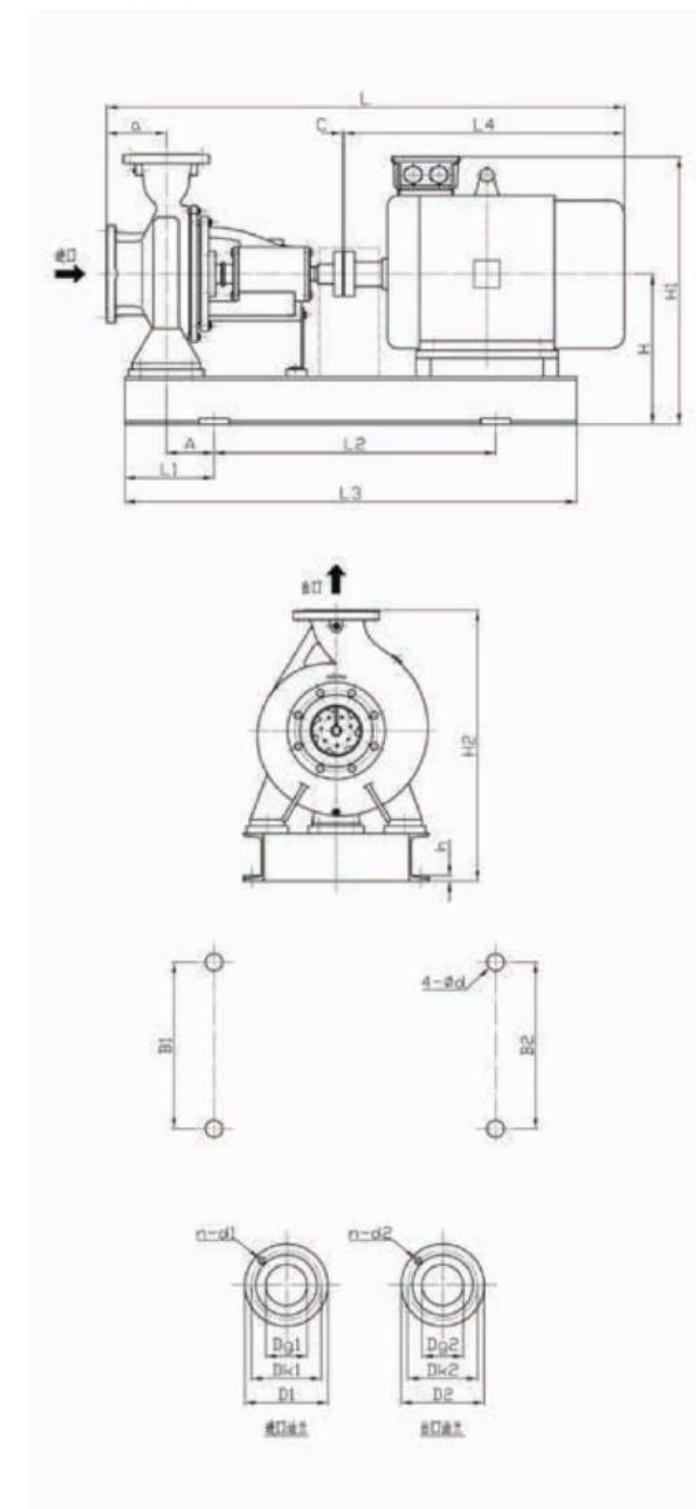


泵型号 Model	配套电机 Motor		安装尺寸												进口法兰				出口法兰						
	机座号 Frame	功率 Power(kW)	a	L	A	L1	L2	L3	L4	B1	B2	H	H1	H2	c	h	d	Dg1	Dk1	D1	n-d1	Dg2	Dk2	D2	n-d2
65/200	Y160M-2	11/15	100	1112	87.5	170	580	955	650	325	325	272	532	497	2	16	φ19								
	Y160L-2	18.5	100	1142	87.5	170	580	1000	680	325	325	272	532	497	2	16	φ19								
	Y180M-2	22	100	1147	117.5	200	580	975	685	350	350	272	547	497	2	16	φ19								
	Y200L-2	30/37	100	1242	137.5	220	830	1050	780	395	395	310	615	535	2	16	φ24								
	Y100L-4	2.2/3	100	852	67.5	150	450	745	380	315	315	272	442	497	2	16	φ19								
	Y112M-4	4	100	882	72.5	155	450	755	420	315	315	272	460	497	2	16	φ19								
	Y132S-4	5.5	100	927	77	159.5	500	804.5	465	315	315	255	468	480	2	16	φ19								
	Y132M-4	7.5	100	967	77	159.5	500	845	505	315	315	255	468	480	2	16	φ19								
	Y160M-2	15	100	1209	132.5	215	800	1050	650	325	325	292	552	517	3	16	φ19								
	Y160L-2	18.5	100	1238	127.5	210	850	1090	680	350	350	294	554	519	3	16	φ19								
65/250	Y180M-2	22	100	1244	147.5	230	850	1069	685	350	350	296	571	521	3	16	φ19								
	Y200L-2	30/37	100	1339	127.5	210	700	1145	780	395	395	320	625	545	3	16	φ24								

Outline dimension 外形尺寸

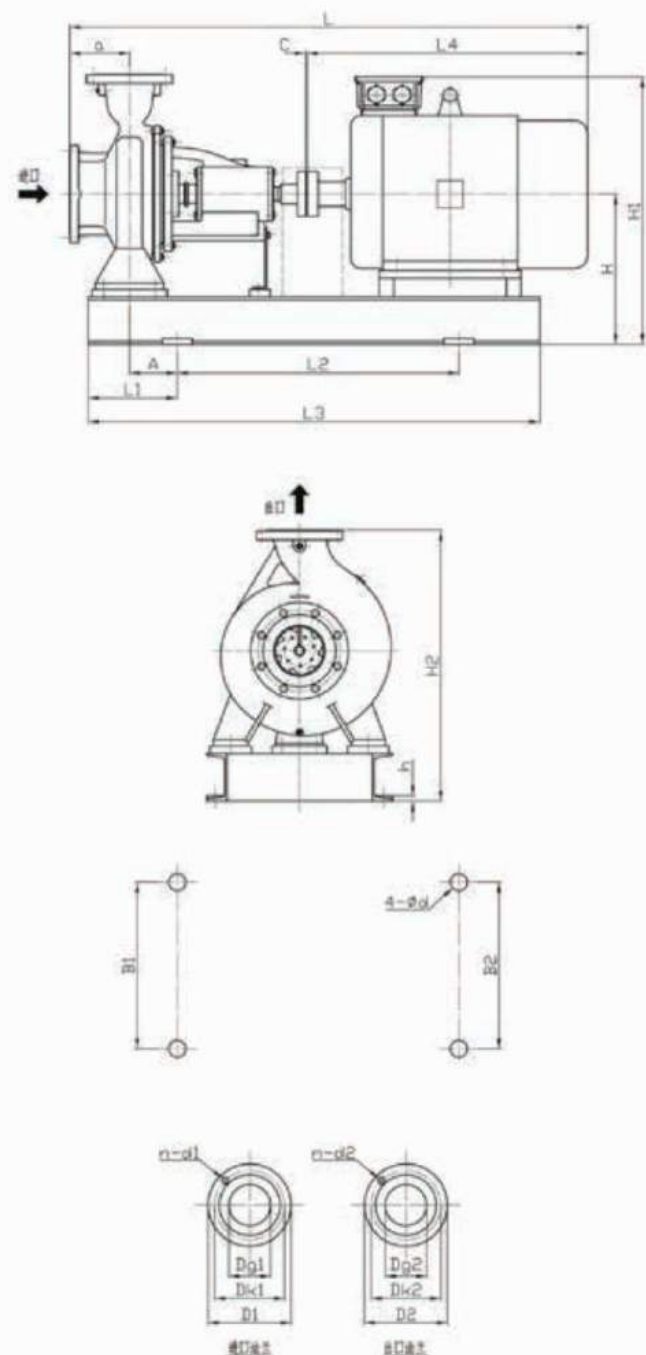


泵型号 Model	配套电机 Motor		安装尺寸															Installing Dimensions										进出口法兰				Suo. Flange		出口法兰		Disch. Flange
	机座号 Frame	功率 Power(kW)	a	L	A	L1	L2	L3	L4	B1	B2	H	H1	H2	c	h	d	Dg1	Dk1	D1	n-d1	Dg2	Dk2	D2	n-d2											
65/260	Y200L-2	30/37	100	1353	140	240	750	1180	780	395	395	316	621	566	3	16	φ24																			
	Y225M-2	45	100	1383	140	240	750	1205	810	430	430	341	676	591	3	16	φ24																			
	Y250M-2	55	100	1493	162	262	800	1304	920	495	495	401	777	651	3	16	φ24																			
	Y132S-4	5.5	100	1038	105	205	580	930	465	355	355	292	505	542	3	16	φ19	φ80	φ160	φ200	8-φ18	φ65	φ145	φ185	4-φ18											
	Y132M-4	7.5	100	1078	105	205	580	970	505	355	355	292	505	542	3	16	φ19																			
	Y160M-4	11	100	1223	120	220	630	1063	650	395	395	316	576	566	3	16	φ24																			
65/320	Y280S-2	75	125	1564	172	272	880	1374	965	550	550	440	840	720	4	16	φ28																			
	Y280M-2	90	125	1614	180	280	880	1435	1015	550	550	436	836	716	4	16	φ28																			
	Y315S-2	110	125	1774	190	290	870	1474	1175	410	420	480	1010	760	4	16	φ28	φ80	φ160	φ200	8-φ18	φ65	φ145	φ185	4-φ18											
	Y160M-4	11	125	1248	95	195	680	1060	650	395	395	340	800	520	3	16	φ24																			
	Y160L-4	15	125	1278	95	195	680	1126	680	395	395	317	577	567	3	16	φ24																			
	Y180M-4	18.5	125	1283	95	195	680	1140	685	395	395	337	612	617	3	16	φ24																			
	Y180L-4	22	125	1323	110	210	700	1140	725	395	395	337	612	617	3	16	φ24																			

Outline dimension 外形尺寸
SV-JAI

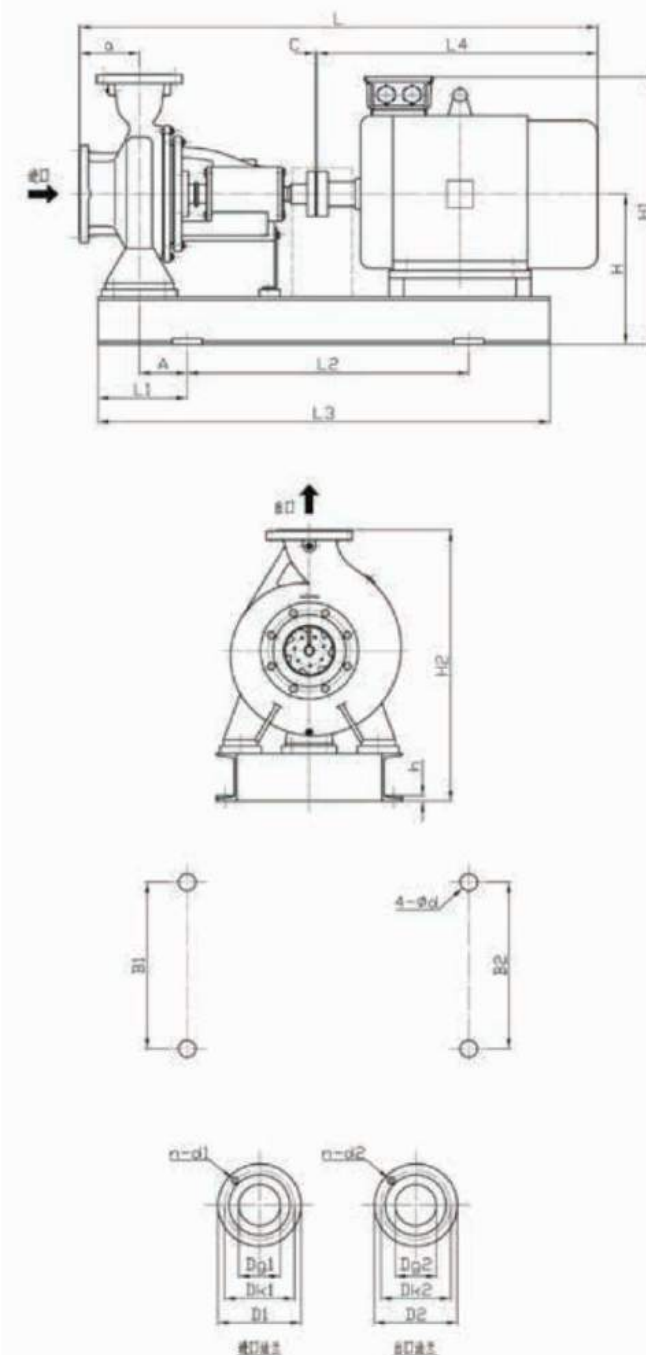[illegible]




Outline dimension 外形尺寸 SV-JAI

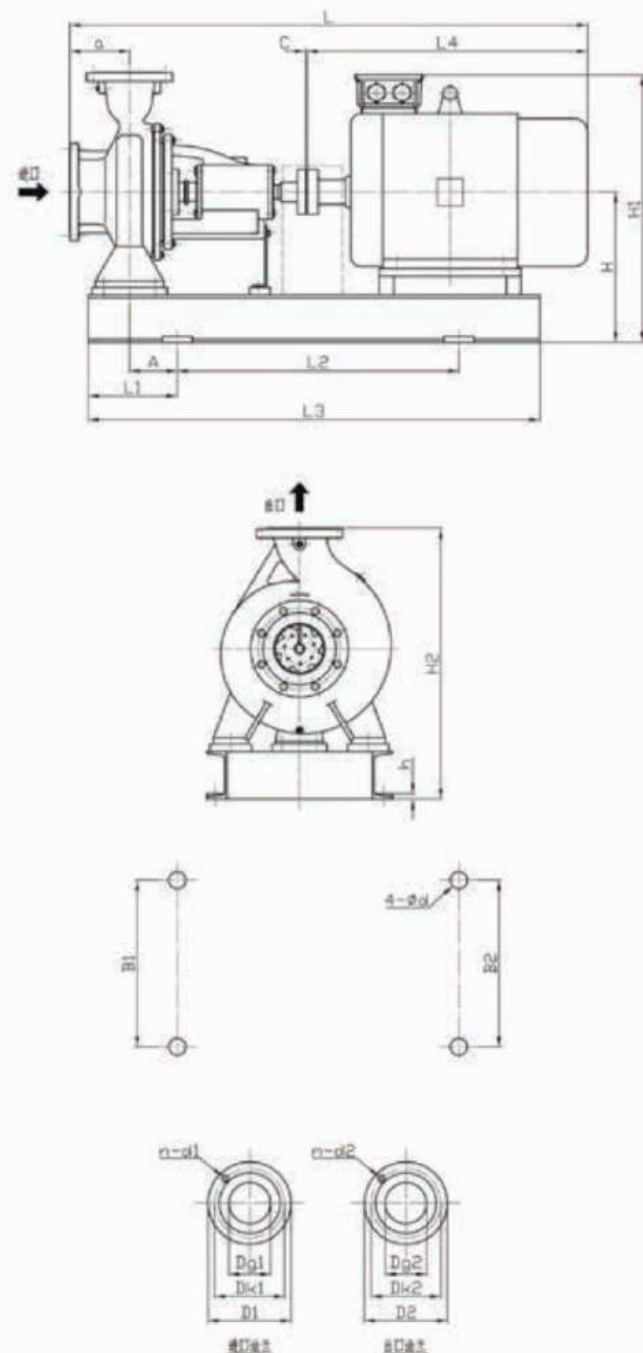

泵型号 Model	配套电机 Motor		安装尺寸 Installing Dimensions														进口法兰 Suc. Flange		出口法兰 Disch. Flange						
	机座号 Frame	功率 Power(kW)	a	L	A	L1	L2	L3	L4	B1	B2	H	H1	H2	c	h	d	Dg1	Dk1	D1	n-d1	Dg2	Dk2	D2	n-d2
80/280	Y225M-2	45	125	1408	180	280	720	1205	810	425	425	371	706	651	3	16	φ24								
	Y250M-2	55	125	1518	180	280	780	1304	920	475	475	410	786	690	3	16	φ28								
	Y280S-2	75	125	1563	180	280	850	1373	965	410	555	440	840	720	3	16	φ28								
	Y280M-2	90	125	1613	180	280	850	1430	1015	555	555	440	840	720	3	16	φ28	φ100	φ180	φ220	8-φ18	φ80	φ160	φ200	8-φ18
	Y132M-4	7.5	125	1103	120	220	580	970	505	395	395	292	505	572	3	16	φ19								
80/320	Y180M-4	11	125	1248	120	220	630	1083	650	395	395	316	576	596	3	16	φ24								
	Y160L-4	15	125	1278	120	220	630	1127	690	395	395	316	576	596	3	16	φ24								
	Y280S-2	75	125	1564	184	284	880	1377	965	410	550	440	840	755	4	16	φ28								
	Y280M-2	90	125	1614	184	284	880	1428	1015	410	550	440	840	755	4	16	φ28								
	Y315S-2	110	125	1774	190	290	1000	1474	1175	625	625	502	1032	817	4	16	φ28								
100/200	Y315M-2	132	125	1809	190	290	1000	1515	1210	625	625	490	1021	805	4	16	φ28								
	Y160M-4	11	125	1248	105	205	750	1085	650	395	395	342	602	657	3	16	φ24								
	Y180M-4	15	125	1278	105	205	750	1130	690	395	395	366	626	681	3	16	φ24								
	Y180M-4	18.5	125	1283	105	205	750	1100	685	395	395	366	641	681	3	16	φ24								
150/100	Y180L-4	22	125	1323	105	205	750	1140	725	395	395	362	637	677	3	16	φ24								




Outline dimension 外形尺寸 SV-JAI

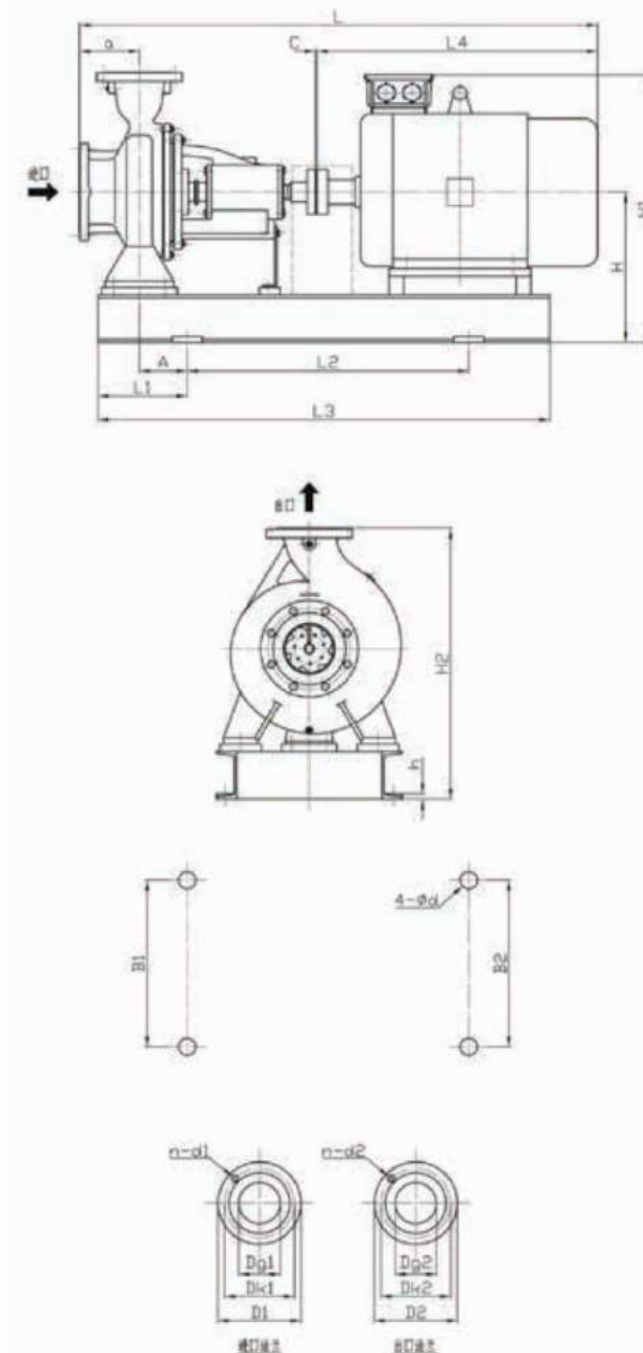

泵型号 Model	配套电机 Motor 机座号 Frame	功率 Power(kW)	安装尺寸 Installing Dimensions															进口法兰 Suc. Flange		出口法兰 Disch. Flange					
			a	L	A	L1	L2	L3	L4	B1	B2	H	H1	H2	c	h	d	Dg1	Dk1	D1	n-d1	Dg2	Dk2	D2	n-d2
80/400	Y180L-4	22	125	1373	130	230	750	1190	725	415	415	424	699	779	3	16	φ24								
	Y200L-4	30	125	1428	140	240	780	1230	760	420	420	422	727	777	3	16	φ24								
	Y225S-4	37	125	1463	140	240	780	1260	815	420	420	422	757	777	3	16	φ24								
	Y200L-2	30/37	125	1378	140	240	750	1180	760	395	395	316	621	596	3	16	φ24								
100/200	Y225M-2	45	125	1403	140	240	750	1205	810	430	430	341	676	621	3	16	φ24								
	Y250M-2	55	125	1518	162	262	800	1304	920	495	495	401	777	681	3	16	φ24								
	Y280S-2	75	125	1563	160	260	850	1373	965	410	555	440	840	720	3	16	φ28								
	Y132S-4	5.5	125	1063	105	205	580	930	465	355	355	292	505	572	3	16	φ19								
	Y132M-4	7.5	125	1103	105	205	580	970	505	355	355	292	505	572	3	16	φ19								
	Y180M-4	11	125	1248	120	220	630	1033	650	395	395	316	576	596	3	16	φ24								
100/260	Y280S-2	75	140	1579	172	272	880	1374	965	550	550	440	840	720	4	16	φ28								
	Y280M-2	90	140	1629	180	280	880	1435	1015	550	550	436	836	716	4	16	φ28								
	Y315S-2	110	140	1789	190	290	870	1474	1175	610	620	480	1010	760	4	16	φ28								
	Y315M-2	132/160	140	1824	190	290	870	1524	1210	610	620	480	1010	760	4	16	φ28								
	Y160M-4	11	140	1263	95	195	680	1060	650	395	395	340	600	620	3	16	φ24								
	Y160L-4	15	140	1293	95	195	680	1126	660	395	395	317	577	597	3	16	φ24								
100/200	Y180M-4	18.5	140	1298	95	195	680	1100	685	395	395	317	612	617	3	16	φ24								
	Y180L-4	22	140	1338	110	210	700	1140	725	395	395	337	612	617	3	16	φ24								




Outline dimension 外形尺寸 SV-JAI

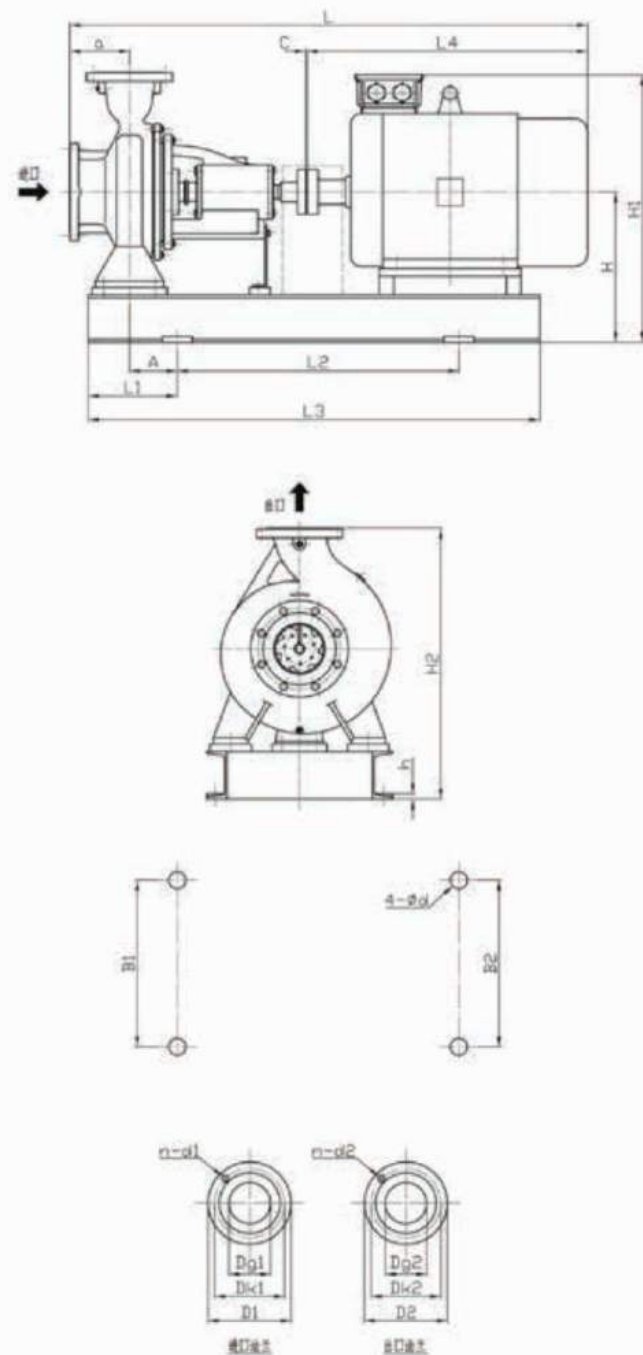

泵型号 Model	配套电机 Motor		安装尺寸 Installing Dimensions														进口法兰 Suc. Flange			出口法兰 Disch. Flange						
	机座号 Frame	功率 Power(kw)	a	L	A	L1	L2	L3	L4	B1	B2	H	H1	H2	c	h	d	Dg1	Dk1	D1	n-d1	Dg2	Dk2	D2	n-d2	
100/320	Y280M-2	90	140	1628	184	264	880	1428	1015	410	550	440	840	755	3	16	φ28									
	Y315S-2	110	140	1788	150	250	1000	1474	1175	625	625	502	1032	817	3	20	φ28									
	Y315M-2	132	140	1823	150	250	1000	1515	1210	625	625	490	1021	805	3	20	φ28									
	Y160M-4	11	140	1263	105	205	750	1085	650	395	395	342	602	657	3	16	φ24	φ125	φ210	φ250	8-φ18	φ100	φ180	φ220	8-φ18	
	Y160L-4	15	140	1293	105	205	720	1125	680	400	400	366	626	681	3	16	φ24									
100/400	Y180M-4	18.5	140	1298	105	205	750	1100	865	395	395	362	637	677	3	16	φ24									
	Y180L-4	22	140	1338	105	205	750	1140	725	395	395	362	637	677	3	16	φ24									
	Y200L-4	30	140	1393	104	204	760	1180	780	385	385	362	667	677	3	16	φ24									
	Y315L-2	160	140	1958	200	320	1100	1750	1265	625	625	495	1025	850	3	16	φ24									
	Y180L-4	22	140	1398	120	240	750	1220	725	500	500	422	697	777	3	16	φ28	φ125	φ210	φ250	8-φ18	φ100	φ180	φ220	8-φ18	
100/400	Y200L-4	30	140	1453	110	230	800	1260	780	490	490	422	727	777	3	16	φ24									
	Y225S-4	37	140	1488	140	260	820	1290	815	540	540	445	780	800	3	16	φ28	φ125	φ210	φ250	8-φ18	φ100	φ180	φ220	8-φ18	
	Y225M-4	45	140	1513	136.5	260	820	1320	840	540	540	442	777	797	3	16	φ28									




Outline dimension 外形尺寸 SV-JAI

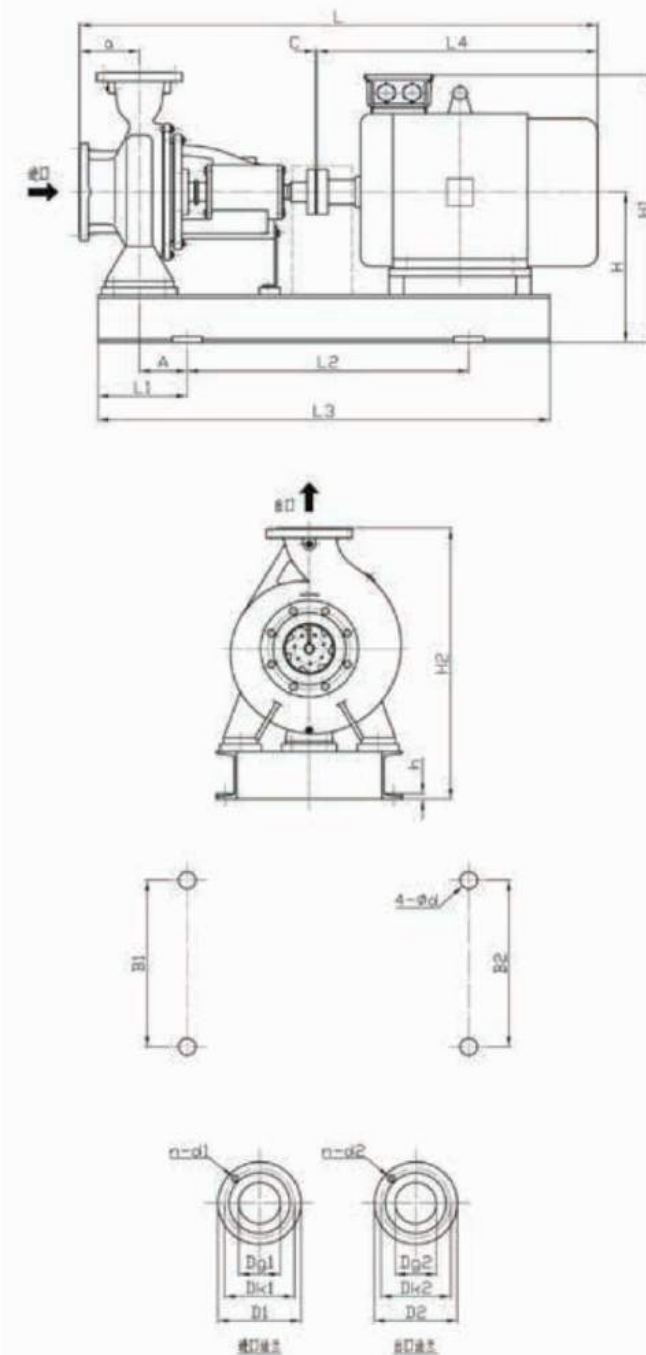

泵型号 Model	配套电机 Motor 机座号 功率 Frame Power(kW)		安装尺寸 Installing Dimensions										进口法兰 Suc. Flange			出口法兰 Disch. Flange										
	a	L	A	L1	L2	L3	L4	B1	B2	H	H1	H2	c	h	d	Dg1	Dk1	D1	n-d1	Dg2	Dk2	D2	n-d2			
125/200	Y225M-2	45	140	1423	104	204	780	1206	810	440	440	362	697	677	3	16	φ24									
	Y280S-2	75	140	1578	184	284	880	1377	965	410	550	440	840	755	3	16	φ28									
	Y280M-2	90	140	1628	184	284	880	1428	1015	410	550	440	840	755	3	16	φ28									
	Y160M-4	11	140	1263	105	205	750	1085	690	395	395	342	602	657	3	16	φ24	φ150	φ240	φ285	8-φ22	φ125	φ210	φ250		
	Y160L-4	15	140	1293	105	205	720	1125	690	400	400	366	626	681	3	16	φ24	φ150	φ240	φ285	8-φ22	φ125	φ210	φ250		
125/260	Y180M-4	18.5	140	1298	105	205	750	1100	695	395	395	366	641	681	3	16	φ24									
	Y180L-4	22	140	1338	105	205	750	1140	725	395	395	362	637	677	3	16	φ24									
	Y200L-4	30	140	1393	104	204	760	1180	780	385	385	362	667	677	3	16	φ24									
	Y160M-4	11	140	1263	105	205	750	1085	690	395	395	342	602	697	3	16	φ24									
	Y160L-4	15	140	1293	105	205	720	1125	690	400	400	366	626	721	3	16	φ24									
125/260	Y180M-4	18.5	140	1298	105	205	750	1100	695	395	395	366	641	721	3	16	φ24									
	Y180L-4	22	140	1338	105	205	750	1140	725	395	395	362	637	717	3	16	φ24									




Outline dimension 外形尺寸 SV-JAI

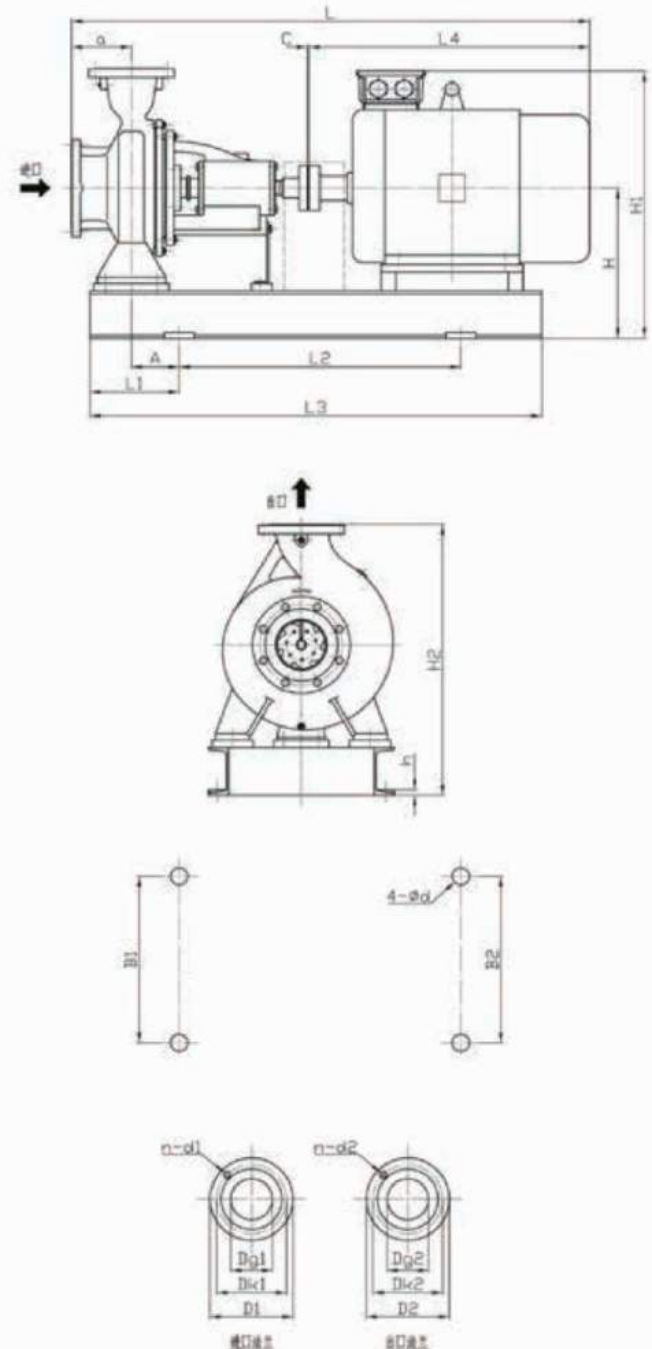

泵型号 Model	配套电机 Motor		安装尺寸 Installing Dimensions														进口法兰 Suc. Flange			出口法兰 Disch. Flange					
	Frame	Power(kW)	a	L	A	L1	L2	L3	L4	B1	B2	H	H1	H2	c	h	d	Dg1	Dk1	D1	n-d1	Dg2	Dk2	D2	n-d2
125/320	Y315L-2	160	140	1958	200	320	1100	1750	1285	625	625	495	1025	850	3	16	φ28								
	Y180M-4	18.5	140	1358	110	230	780	1185	685	485	495	423	698	778	3	16	φ24								
	Y180L-4	22	140	1398	110	230	780	1220	725	495	495	423	698	778	3	16	φ24								
	Y200L-4	30	140	1453	110	230	800	1260	760	490	490	422	727	777	3	16	φ24								
125/400	Y225S-4	37	140	1488	140	260	820	1290	815	540	540	445	780	800	3	16	φ28								
	Y225M-4	45	140	1513	136.5	260	820	1320	840	540	540	442	777	797	3	16	φ28								
	Y225L-4	55	140	1488	150	270	800	1290	815	490	490	471	806	871	3	16	φ28								
	Y250M-4	55	140	1593	150	270	870	1385	920	490	490	471	847	871	3	16	φ28								
125/500	Y280S-4	75	140	1638	190	310	910	1451	965	550	550	475	875	875	3	16	φ28								
	Y280M-4	90	180	1774	220	340	840	1525	920	550	550	535	911	1035	4	16	φ28								
	Y280L-4	110	180	1819	220	340	870	1597	965	620	620	535	935	1035	4	16	φ28								
	Y315M-4	132	180	2069	160	280	1150	1724	1215	625	625	555	1085	1055	4	16	φ28								




Outline dimension 外形尺寸 SV-JAI

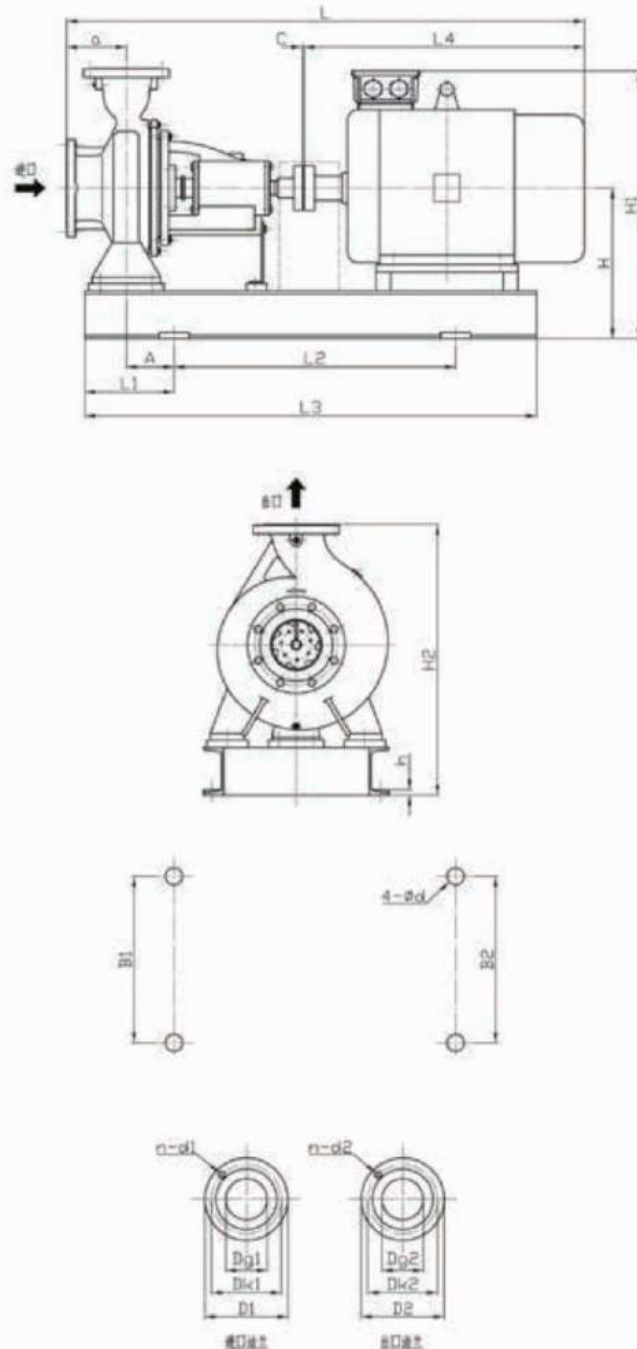

泵型号 Model	配套电机 Motor		安装尺寸										Installing Dimensions						进口法兰			出口法兰			Disch. Flange	
	机座号 Frame	功率 Power(kW)	a	L	A	L1	L2	L3	L4	B1	B2	H	H1	H2	c	h	d	Dg1	Dk1	D1	n-d1	Dg2	Dk2	D2	n-d2	
150/200	Y160L-4	15	160	1338	115	235	700	1170	680	550	550	396	656	796	3	16	φ24	φ200	φ295	φ340	12-φ22	φ150	φ240	φ285	8-φ22	
	Y180M-4	18.5	160	1343	115	235	780	1145	685	550	550	395	670	795	3	16	φ24									
	Y180L-4	22	160	1383	115	235	780	1184	725	550	550	395	670	795	3	16	φ24									
	Y180M-4	18.5	160	1378	80	200	750	1180	685	440	440	392	667	747	3	16	φ24									
150/260	Y180L-4	22	160	1418	119	239	750	1223	725	440	440	396	671	751	3	16	φ24	φ200	φ295	φ340	12-φ22	φ150	φ240	φ285	8-φ22	
	Y200L-4	30	160	1473	120	240	800	1258	780	440	440	382	697	747	3	16	φ24									
	Y200L-4	37	160	1508	120	240	800	1290	815	440	440	396	731	751	3	16	φ24									
	Y225S-4	45	160	1479	110	230	800	1275	780	550	550	396	701	796	3	16	φ24									
150/320	Y225S-4	37	160	1514	130	250	820	1290	815	540	540	436	771	836	3	16	φ28	φ200	φ295	φ340	12-φ22	φ150	φ240	φ285	8-φ22	
	Y225M-4	45	160	1539	140	260	820	1315	840	540	540	442	777	842	3	16	φ28									
	Y250M-4	55	160	1619	150	270	870	1385	920	540	540	436	812	836	3	16	φ28									
	Y225S-4	37	160	1509	110	230	800	1290	815	550	550	475	810	925	4	16	φ28									
150/400	Y225M-4	45	160	1534	110	230	850	1315	840	550	550	475	810	925	4	16	φ28	φ200	φ295	φ340	12-φ22	φ150	φ240	φ285	8-φ22	
	Y250M-4	55	160	1614	110	230	910	1365	920	550	550	475	851	925	4	16	φ28									
	Y280S-4	75	160	1659	160	310	910	1454	965	550	550	475	875	925	4	16	φ28									
	Y280M-4	90	160	1709	190	310	910	1510	1015	550	550	475	875	925	4	16	φ28									




Outline dimension 外形尺寸 SV-JAI

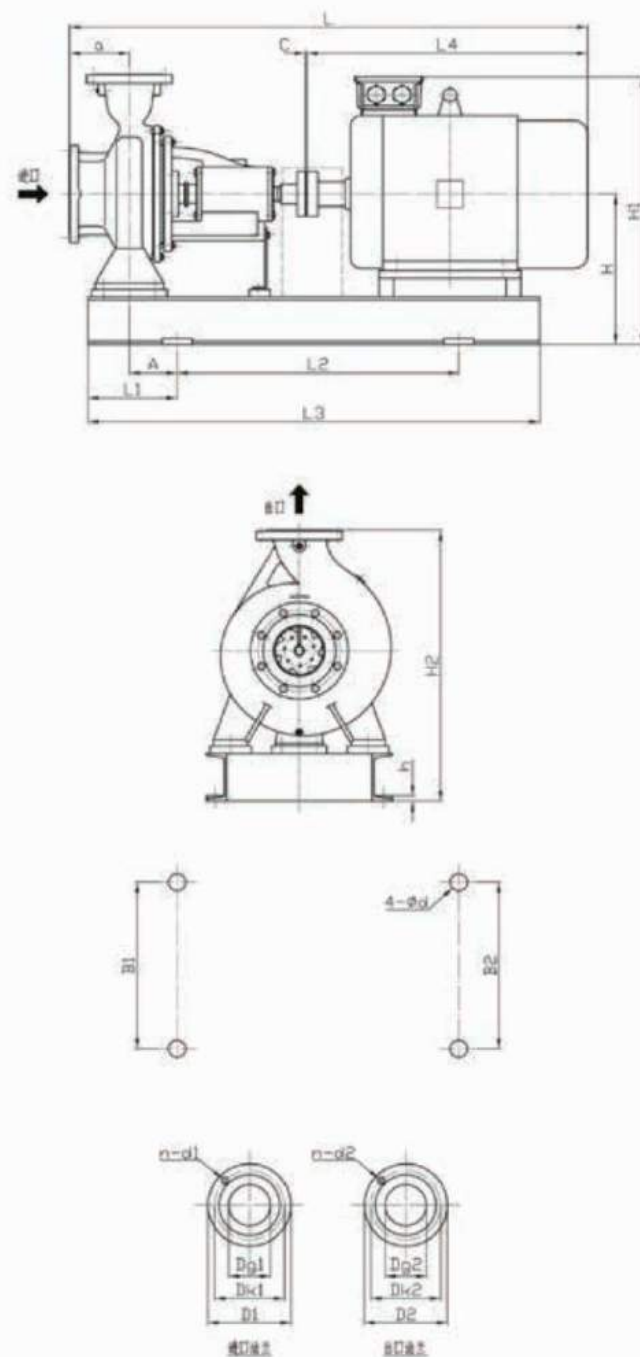

泵型号 Model	配套电机 Motor		安装尺寸 Installing Dimensions														进口法兰 Suc. Flange			出口法兰 Disch. Flange					
	机座号 Frame	功率 Power(kW)	a	L	A	L1	L2	L3	L4	B1	B2	H	H1	H2	c	h	d	Dg1	Dk1	D1	n-d1	Dg2	Dk2	D2	n-d2
150/500	Y250M-4	55	180	1774	220	340	840	1525	920	550	550	535	911	1035	4	16	φ28								
	Y280S-4	75	180	1819	220	340	870	1597	985	620	620	535	935	1035	4	16	φ28								
	Y280M-4	90	180	1869	190	320	1083	1865	1015	615.5	615.5	535	935	1035	4	16	φ28	φ200	φ295	φ340	12-φ22	φ150	φ240	φ285	8-φ22
	Y315S-4	110	180	2069	160	280	1150	1724	1215	625	625	555	1085	1055	4	16	φ28								
200/260	Y315M-4	132	180	2084	220	340	1000	1760	1240	625	625	560	1090	1080	4	16	φ28								
	Y315L-4	160/200	180	2169	220	340	1100	1820	1315	625	625	560	1090	1060	4	16	φ28								
	Y180L-4	22	180	1454	110	230	800	1238	725	550	550	396	671	796	3	16	φ24	φ250	φ355	φ405	12-φ26	φ200	φ295	φ340	12-φ22
	Y225S-4	37	180	1544	130	250	820	1290	815	540	540	436	771	836	3	16	φ24								
200/320	Y225M-4	45	200	1714	130	250	850	1430	815	540	540	540	875	990	4	16	φ24								
	Y250M-4	55	200	1794	130	250	900	1525	920	540	540	540	916	990	4	16	φ24	φ250	φ355	φ405	12-φ26	φ200	φ295	φ340	12-φ22
	Y280S-4	75	200	1839	160	260	1000	1604	965	540	540	535	935	985	4	16	φ24								
	Y280M-4	90	200	1889	160	260	1000	1655	1015	540	540	535	935	1035	4	16	φ24								
200/400	Y315S-4	110	200	2089	160	260	1100	1720	1215	625	625	535	1065	1035	4	16	φ28	φ250	φ355	φ405	12-φ26	φ200	φ295	φ340	12-φ22
	Y315M-4	132	200	2114	240	360	1000	1770	1240	625	625	540	1070	1040	4	16	φ28								



Outline dimension 外形尺寸 SV-JAI

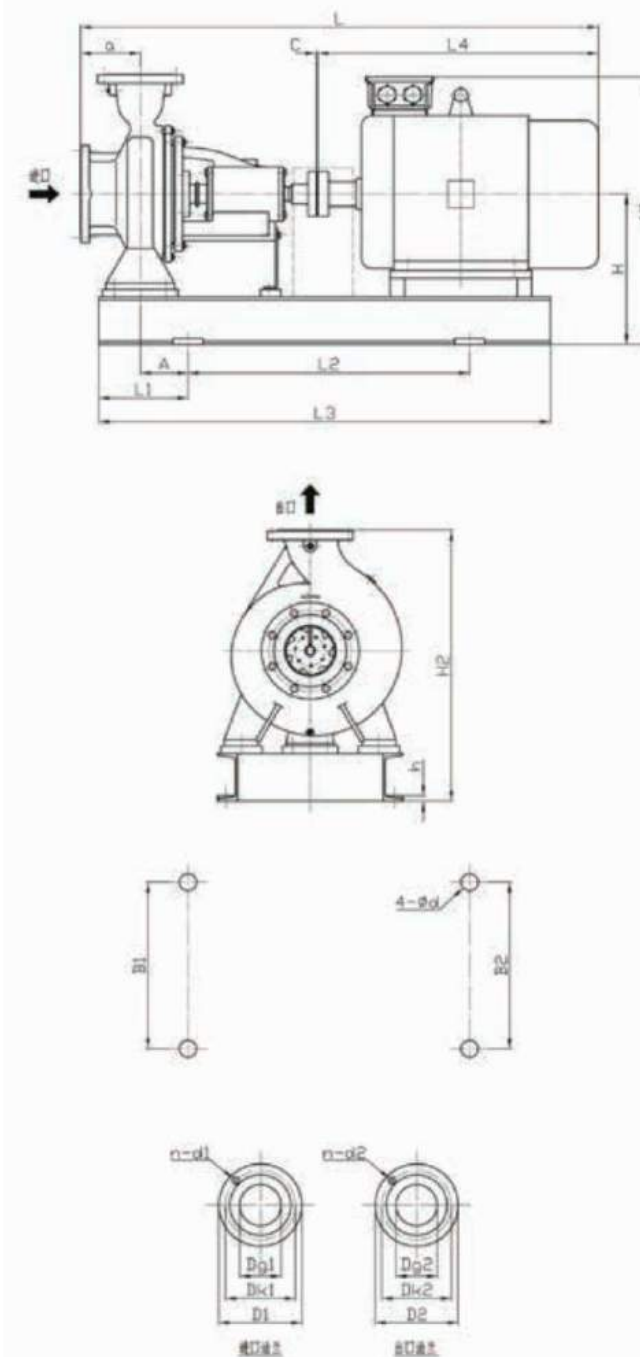

泵型号 Model	配套电机 Motor		安装尺寸 Installing Dimensions														进口法兰 Suc. Flange			出口法兰 Disch. Flange					
	机座号 Frame	功率 Power(kW)	a	L	A	L1	L2	L3	L4	B1	B2	H	H1	H2	c	h	d	Dg1	Dk1	D1	n-d1	Dg2	Dk2	D2	n-d2
200/500	Y315M-4	132	210	2129	210	380	1100	1825	1240	710	710	595	1115	1085	4	16	φ28								
	Y315L-4	160/200	210	2204	210	380	1100	1850	1315	710	710	595	1115	1085	4	16	φ28	φ250	φ355	φ405	12-φ26	φ200	φ295	φ340	12-φ22
	Y225M-6/4	30/45	200	1714	155	300	850	1480	840	595	595	540	875	1065	4	16	φ28								
	Y250M-6/4	37/55	200	1794	155	300	900	1550	920	615	615	540	916	1085	4	16	φ28								
250/320	Y280S-4	75	200	1839	190	335	900	1629	965	595	595	540	940	1065	4	16	φ28	φ300	φ410	φ460	12-φ26	φ250	φ355	φ405	12-φ26
	Y280M-4	90	200	1889	180	335	910	1680	1015	595	595	540	940	1065	4	16	φ28								
	Y315S-4	110	200	2089	155	300	1000	1745	1215	625	625	540	1070	1065	4	16	φ28								
	Y315M-4	132	260	2354	210	380	1100	1989	1215	720	720	605	1135	1165	4	16	φ28								
300/320	Y315M-4	132	260	2379	210	380	1100	2020	1240	720	720	605	1135	1165	4	16	φ28	φ350	φ470	φ520	16-φ26	φ300	φ410	φ460	12-φ26
	Y315L-4	160	260	2454	210	380	1200	2055	1315	720	720	605	1135	1165	4	16	φ28								
	Y280S-6	45	260	2104	210	380	1100	1855	965	720	720	580	980	1140	4	16	φ28								
	Y280M-6	55	260	2154	210	380	1100	1910	1015	725	725	585	985	1145	4	16	φ28								
300/400	Y315M-4	160/200	280	2474	257.5	427.5	1250	2055	1315	785	785	705	1235	1305	4	16	φ28	φ350	φ470	φ520	16-φ26	φ300	φ410	φ460	12-φ26
	Y315L-4	250	280	2579	260	430	1300	2168	1420	785	785	705	1360	1305	4	16	φ28								